


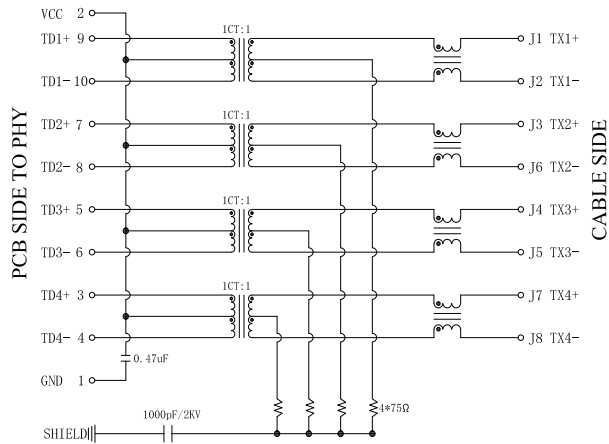

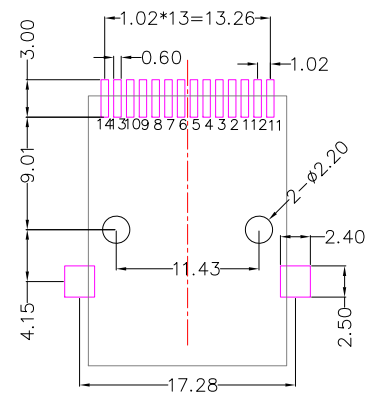
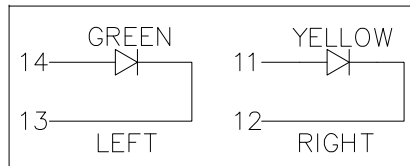


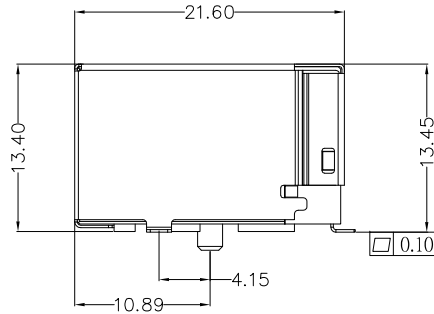

SCHEMATIC

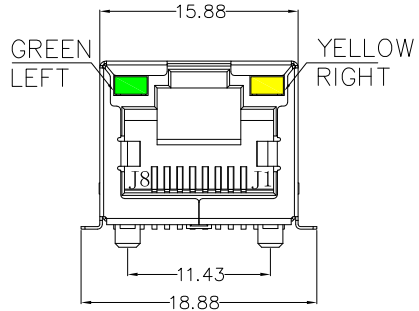

PCB LAYOUT



LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

SPECIFICATIONS

Material:

- 1.Housing : LCP,Black
- 2.Terminal Bracket : LCP,Black
- 3.Contact : Phosphor Bronze , Gold Plating over Nickel
- 4.Shield : Brass , Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
- 2.Storage Temperature : -40°C ~ +85°C

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

10/09/25

CHECKED BY:

Jacky Chen

DATE

10/09/25

APPROVED BY:

Tony Kao

DATE

10/09/25

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

RJ45

RJ45+TRANSFORMER 1000 BASE WITH LED

MJ45-211Q38-GY-S473

MJ45-211Q38-GY-S473

SIZE

A4

VER

R

ITEM NO. DESCRIPTION DRAWN DATE

A I B I C I D I E I F I G I H I I J