

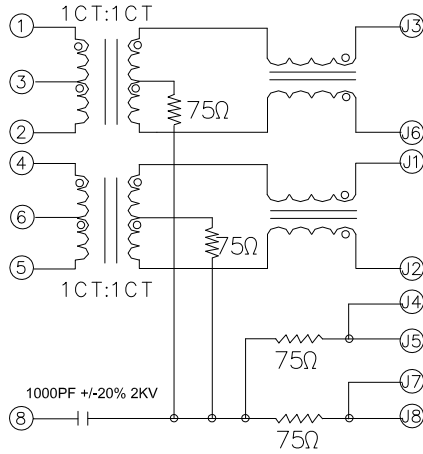





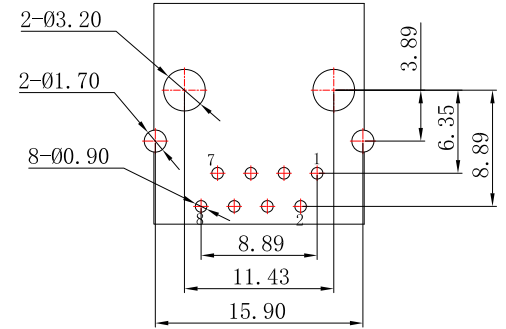

SCHEMATIC

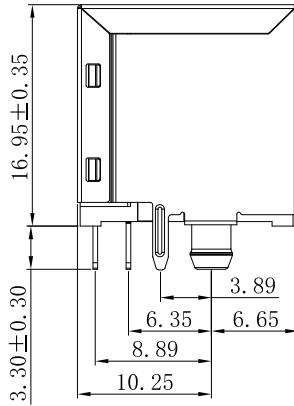

PCB LAYOUT

ELECTRICAL SPECIFICATIONS AT 25 °C

LNSERTION LOSS db max	Return Loss dB mln				Crosstalk(db TYP)			Common Mode Rejection (dB TYP)		Hipot(vrms)
	1-100MHz	1-30MHz	30- 60MHz	60- 80MHz	1-30MHz	30- 60MHz	60- 80MHz	1- 50MHz	50-150MHz	
-1	-18	-16	-12	-30	-30	-30	-30	-30	-30	1500

SPECIFICATIONS

Environmental:

1.Operation Temperature : -40°C ~ +85°C

2.Storage Temperature : -40°C ~ +85°C

Material:

1.Housing : PBT,Black

2.Contact : Phosphor Bronze , Gold Plating over Nickel

3.Shield : Brass , Nickel Plated

Environmental:

1.Operation Temperature : -40°C ~ +85°C

2.Storage Temperature : -40°C ~ +85°C

				DRAWN BY: Jack Lu				DATE	09/08/25	MAT'L		TITLE		RJ45	
				CHECKED BY: Jacky Chen				DATE	09/08/25	FINISH		MODLE		180度直插型 L=16.8mm 1X1 100 BASE-T 無燈無彈	
				APPROVED BY: Tony Kao				DATE	09/08/25	SCALE					