

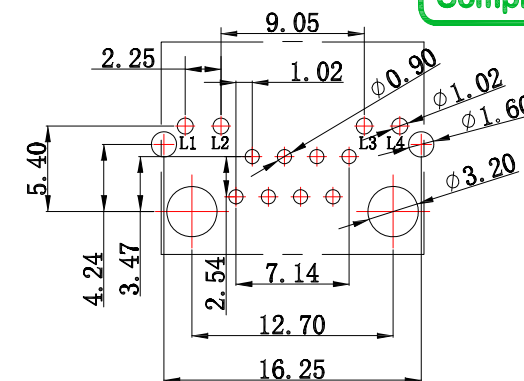


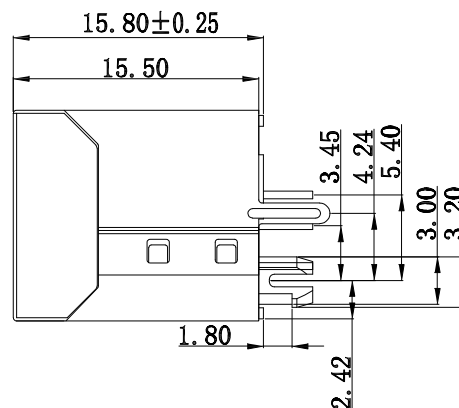

PCB LAYOUT
TOP VIEW

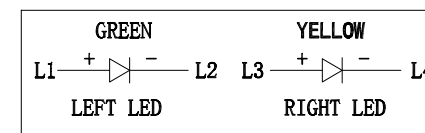

SPECIFICATIONS

Electrical:


- 1.Voltage Rating : 125 VAC RMS
- 2.Current Rating : 1.5 A
- 3.Contact Resistance : 30 mΩ MAX
- 4.Insulation Resistance : 1000 MΩ MIN
- 5.Dielectric Strength : 1000V AC OR 1500V DC RMS AT 0.5mA

Material:

- 1.Housing : PBT,Black
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Insert : PBT,Black
- 4.Shield : Brass , Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C

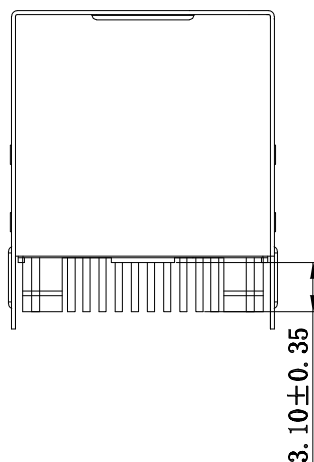RJ45-52T811EGY_x-S307

— 鍍層厚度：

Blank : 1u"
1 : 3u"
2 : 15u"
3 : 30u"
5 : 6u"

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3° 3RD. ANGEL'S  UNITS MM	DRAWN BY: DATE		MAT'L		TITLE	RJ45	
					Jack Lu	08/20/25	FINISH		MODLE	RJ45 8P8C屏蔽無邊 WITH LED	
					CHECKED BY: DATE						
					Jacky Chen	08/20/25	SCALE	1 : 1	DWG NO.	RJ45-52T811EGYx-S307	SIZE A4
					APPROVED BY: DATE		SHEET NO.	1 of 1	PART NO.	RJ45-52T811EGYx-S307	VER R
ITEM NO.	DESCRIPTION	DRAWN	DATE	Tony Kao	08/20/25						