


Blank : 1u"
1 : 3u"
2 : 15u"
3 : 30u"
5 : 6u"

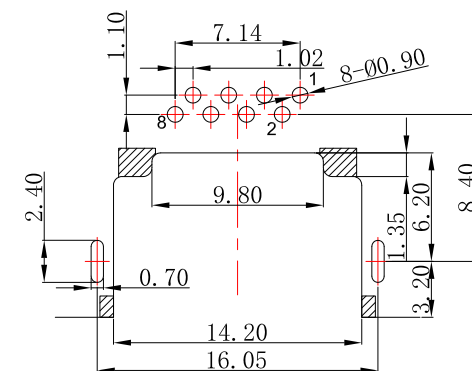

PCB LAYOUT

SPECIFICATIONS

Electrical:






- 1.Voltage Rating : 125 VAC
- 2.Current Rating : 1.5 A
- 3.Contact Resistance : 40 mΩ MAX
- 4.Insulation Resistance : 500 MΩ MIN
- 5.Dielectric Strength : 500 VAC

Material:

- 1.Housing : PA9T
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Shield : SUS , Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
2.Storage Temperature : 0°C ~ +70°C

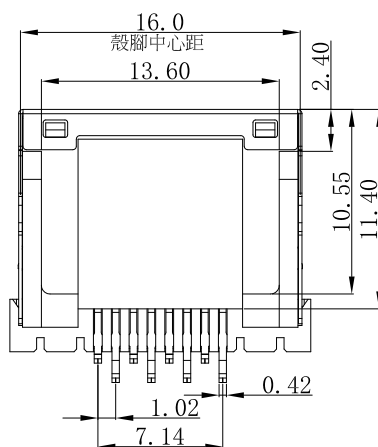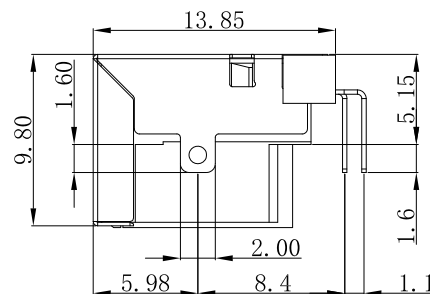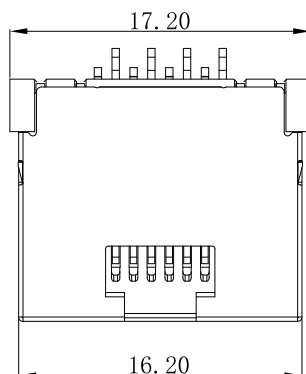

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. Up to 5 Above 3 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle ± 0.2 ± 0.3 ± 0.4 ± 0.5 ± 0.3' 3RD. ANGEL'S  UNITS MM	DRAWN BY:	DATE	MAT'L		TITLE	RJ45
					Jack Lu	07/28/25	FINISH		MODLE	RJ45 8P8C 沉板式H9.8 mm DIP
					Jacky Chen	07/28/25		SCALE	1 : 1	DWG NO.
					APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	RJ45-58T811E-x-S307
					Tony Kao	07/28/25				VER
ITEM NO.	DESCRIPTION	DRAWN	DATE							