

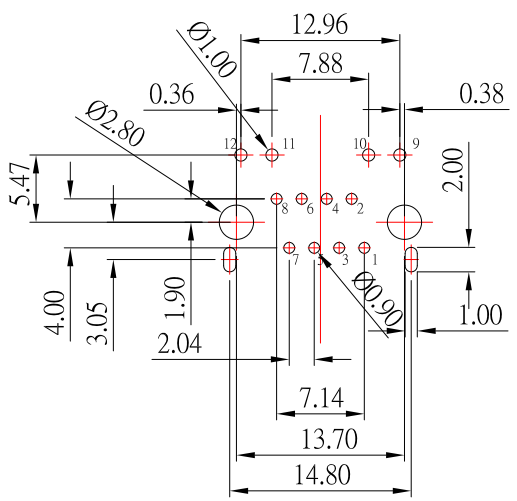

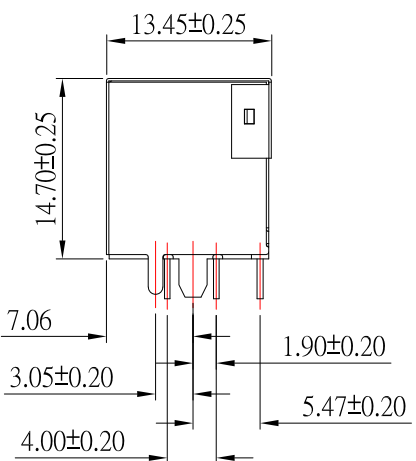


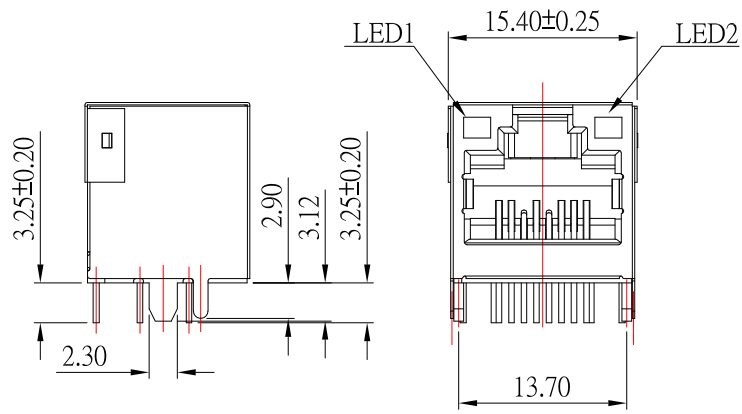

PCB LAYOUT



RJ45-6371x-GY-S492

鍍層厚度:

Blank : 1u"
1 : 3u"
2 : 15u"
3 : 30u"
5 : 6u"
6 : 50u"

SPECIFICATIONS

Electrical:

- 1.Voltage Rating : 125 VAC RMS
- 2.Current Rating : 1.5 AMP
- 3.Contact Resistance : 20 mΩ MAX
- 4.Insulation Resistance : 1000 MΩ MIN. @500 VDC
- 5.Dielectric Strength : 1000 VAC RMS 60 HZ 1 MIN

Material:

- 1.Housing : PA9T,Black
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Shield : Brass , Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
- 2.Storage Temperature : -40°C ~ +85°C

				DRAWN BY: Jack Lu				DATE	08/22/25	MAT'L	TITLE	RJ45	
				CHECKED BY: Jacky Chen				DATE	08/22/25			MODLE	
				APPROVED BY: Tony Kao				DATE	08/22/25	SCALE	1 : 1	DWG NO.	RJ45-6371x-GY-S492
										SHEET NO.	1 of 1	PART NO.	RJ45-6371x-GY-S492
												SIZE	A4
												VER	R

CONTACT

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2

Above 5 ~ 15 ±0.3

Above 15 ~ 30 ±0.4

Above 30 ~ 50 ±0.5

Angle ±0.3

3RD. ANGEL'S

UNITS

MM