


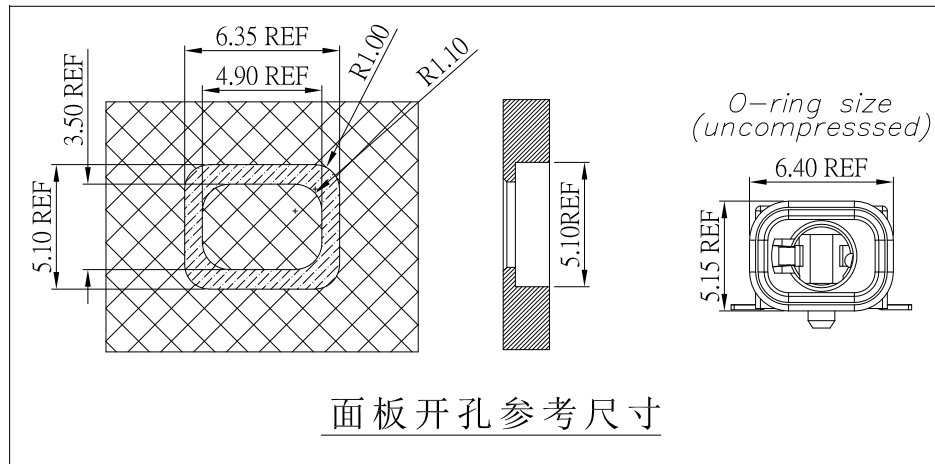


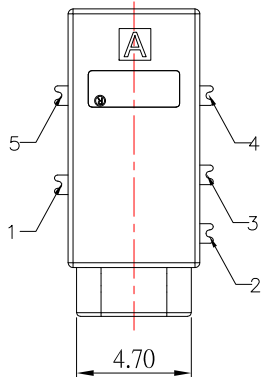
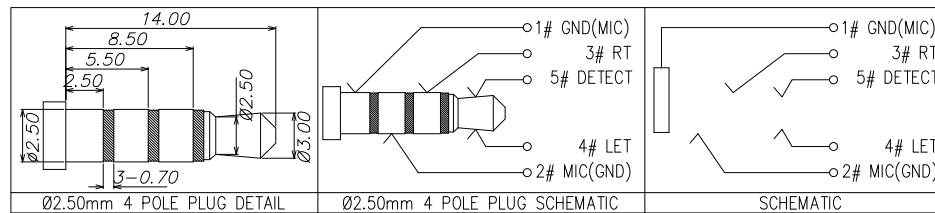




面板开孔参考尺寸



IPX7

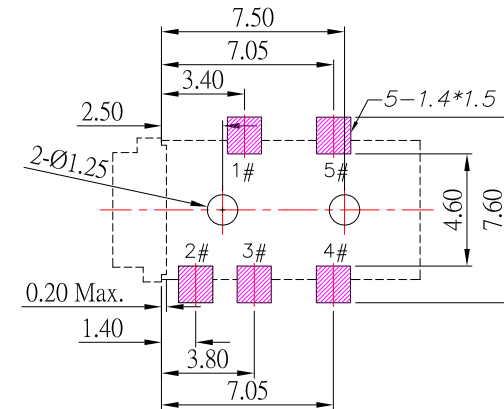

PCB Layout
(Top view)

SPECIFICATION

- 1.Rating :1.0A
- 2.Contact resistance : $\leq 100\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage :500VAC
- 5.Insertion and extraction force :3-30N
- 6.life test :5,000 cycles
- 7.Waterproof Lever:IPx7

4	GLUE	EPOXY	COLOR BLACK	1
3	TERMINAL	PHOSPHOR BRONZE	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA	5
2	COVER	PA10T	COLOR BLACK	1
1	HOUSING	PA10T	COLOR BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 06/30/26
DATE: 06/30/26
DATE: 06/30/26

MATL: FINISH: SCALE: 1 : 1
TITLE: JACK
MODLE: 2.5mm PHONE JACK 防水型
DWG NO.: PJ-WPS2291A-S457
PART NO.: PJ-WPS2291A-S457
SHEET NO.: 1 of 1

SIZE: A4
VER: R