

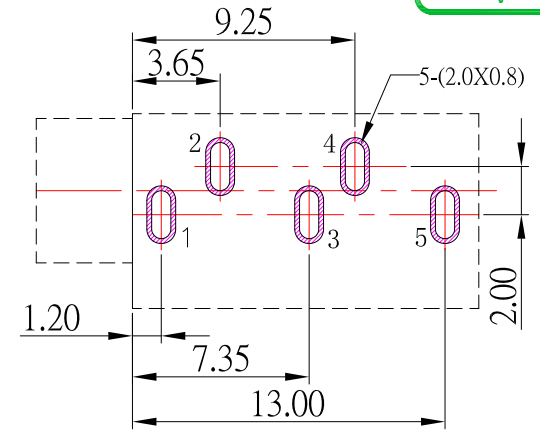
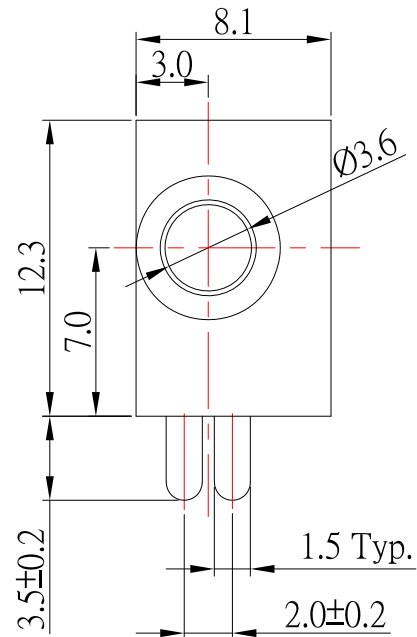


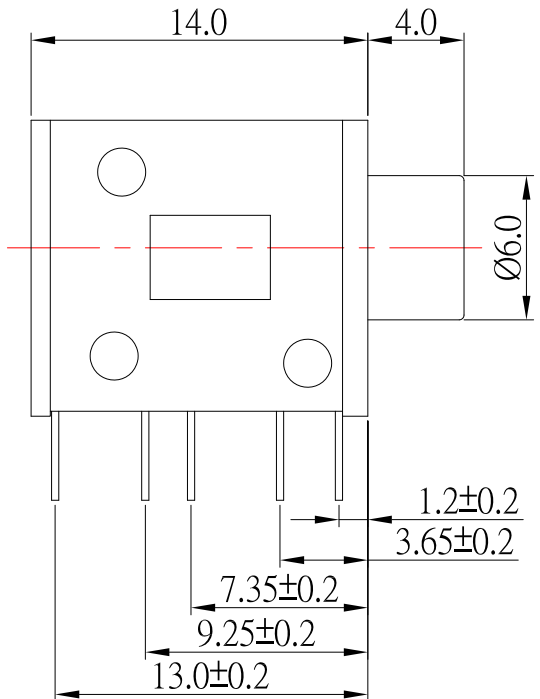

P.C.B LAYOUT

SPECIFICATION

- 1.Rating : DC 30V , 1.0A
- 2.Contact resistance : ≤30mΩ
- 3.Insulation resistance : ≥100MΩ
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles



PJ-D3025R-xx-S124

Color :
Black : Blank
Pink : PI
Blue : BL
Green : GR

8	COVER	1	PA66	
7	HOUSING	1	PA66	
6	AXIS SUPPORT	1	BRASS	Ni-Plating
5	5# CONTACT FOOT	1	SUS	Sn-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
3	3# CONTACT FOOT	1	BRASS	Sn-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
1	1# CONTACT FOOT	1	BRASS	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

ITEM NO.

DESCRIPTION

DRAWN

DATE

CONTACT

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S

UNITS

MM

DRAWN BY: Jack Lu

CHECKED BY: Jacky Chen

APPROVED BY: Tony Kao

DATE: 06/24/26

DATE: 06/24/26

DATE: 06/24/26

MAT'L

FINISH

SCALE

SHEET NO.

TITLE: JACK

MODLE: PHONE JACK

DWG NO.: PJ-D3025R-xx-S124

PART NO.: PJ-D3025R-xx-S124

SIZE: A4

VER: R