


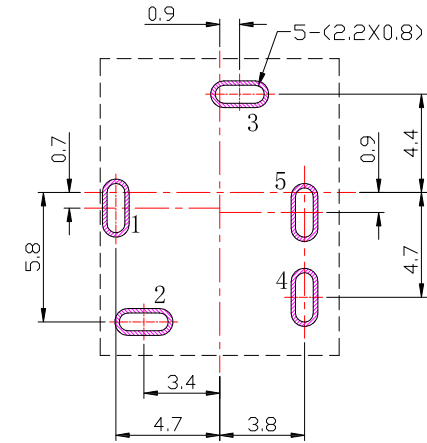

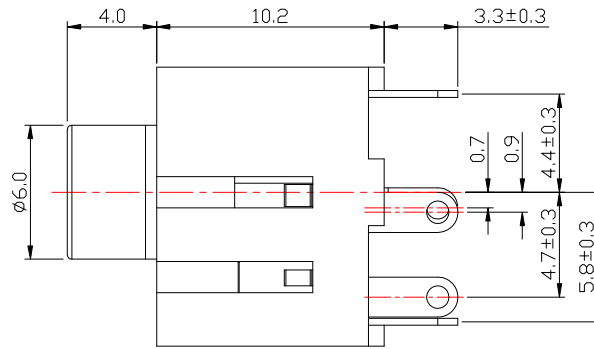
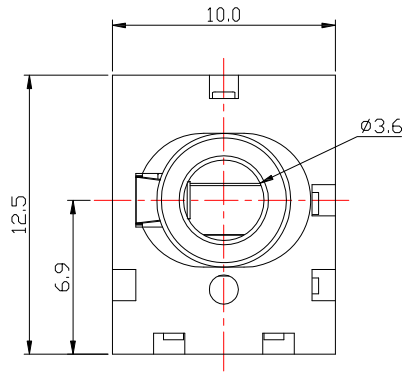


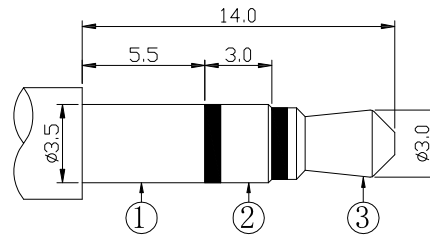

P.C.B LAYOUT
(TOP VIEW)

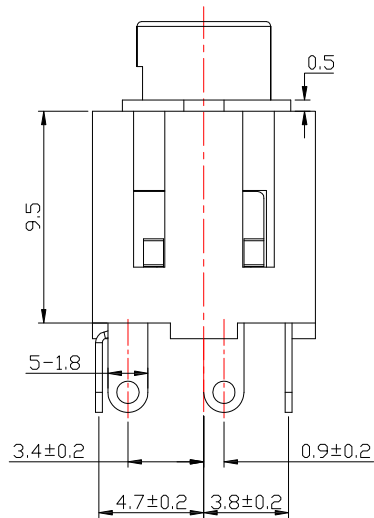

3.5mm 3 POLE PLUG



SPECIFICATION

- Rating : DC 30V, 1.0A ;
- Contact resistance : $\leq 30\text{m}\Omega$;
- Insulation resistance : $\geq 100\text{M}\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-30N
- life test : 5,000 cycles °

6	HOUSING	1	PBT	
5	CONTACT FOOT	1	BRASS	Ag-Plated
4	CONTACT FOOT	1	BRASS	Ag-Plated
3	SPRING	1	PHOSPHOR BRONZE	Ag-Plated
2	SPRING	1	PHOSPHOR BRONZE	Ag-Plated
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plated
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	JACK
Jack Lu	12/26/25	FINISH		MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	PJ-D3054V-S124
Jacky Chen	12/26/25	SHEET NO.	1 of 1	PART NO.	PJ-D3054V-S124
APPROVED BY:	DATE				
Tony Kao	12/26/25				

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------