

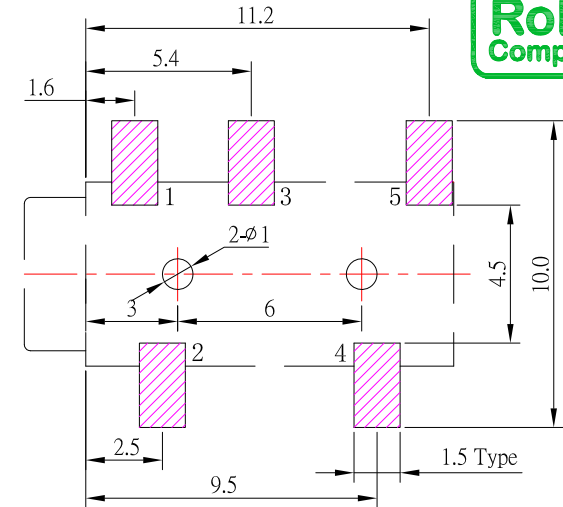
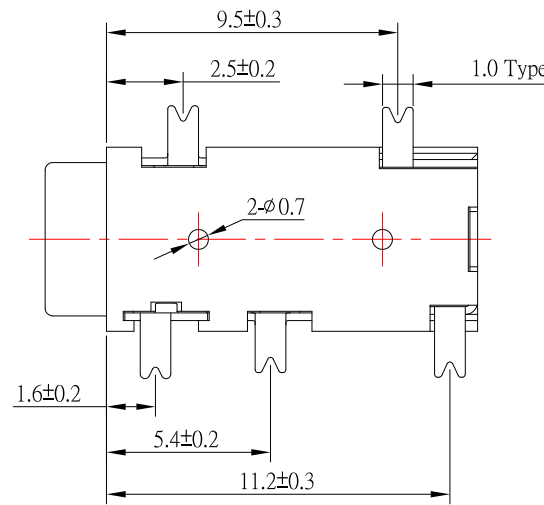
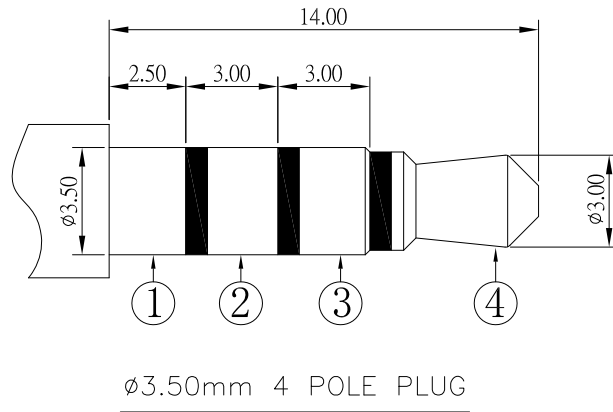
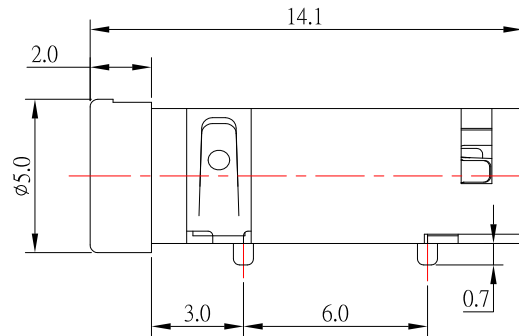


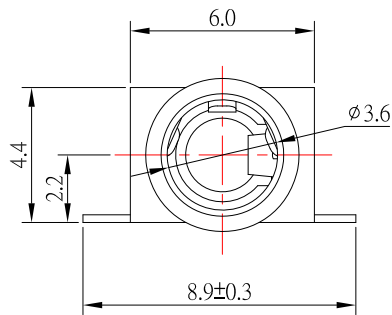

P.C.B LAYOUT
TOP VIEW



SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

⑥	HOUSING	1	PA9T	
⑤	CONTACT FOOT#5	1	BRASS	Ag-Plating
④	CONTACT FOOT#4	1	PHOSPHOR BRONZE	Ag-Plating
3	CONTACT FOOT#3	1	PHOSPHOR BRONZE	Ag-Plating
②	CONTACT FOOT#2	1	PHOSPHOR BRONZE	Ag-Plating
①	CONTACT FOOT#1	1	PHOSPHOR BRONZE	Ag-Plating
No	PART NAME	QTY	MATERIAL	REMARK



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
08/26/21
DATE
08/26/21
DATE
08/26/21

MAT'L
FINISH
SCALE
SHEET NO.

TITLE: JACK
MODLE: PHONE JACK
DWG NO.: PJ-S3127G-S124
PART NO.: PJ-S3127G-S124

SIZE: A4
VER: R1

1	更新料號	Jack	082621
ITEM NO.	DESCRIPTION	DRAWN	DATE