

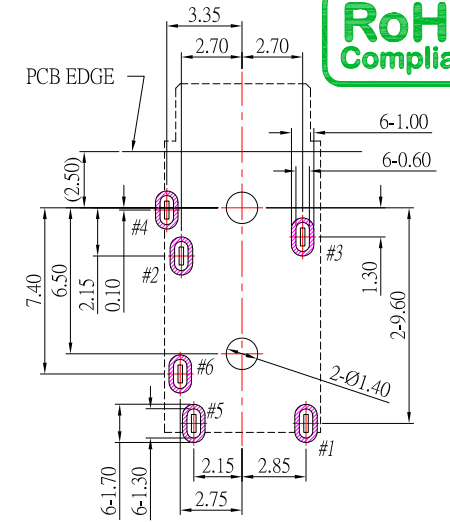
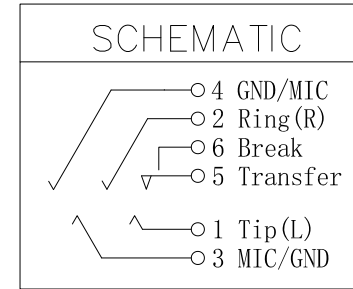
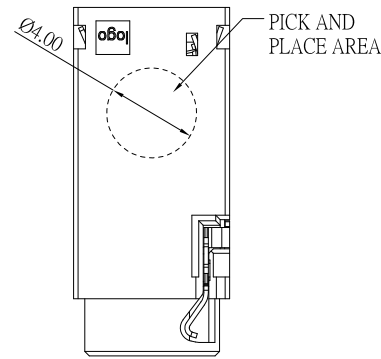
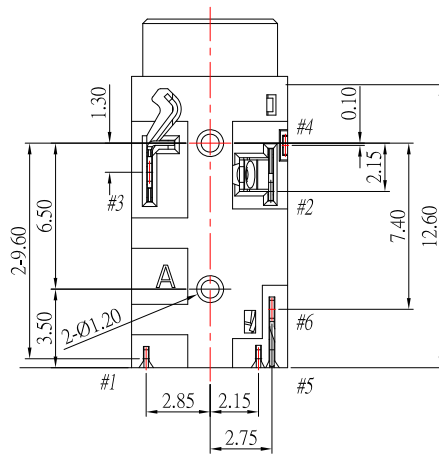
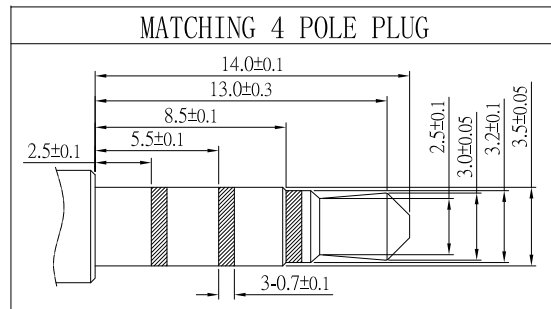
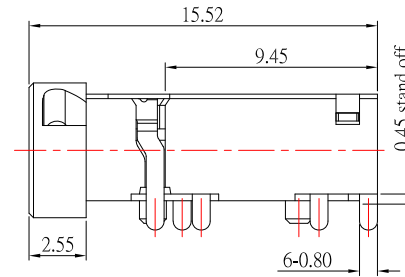




**P.C.B LAYOUT
TOP VIEW**

SPECIFICATION

- 1.Rating :12V , 1.0A ;
- 2.Contact resistance : 50mΩ Max ;
- 3.Insulation resistance : 100MΩ Min ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

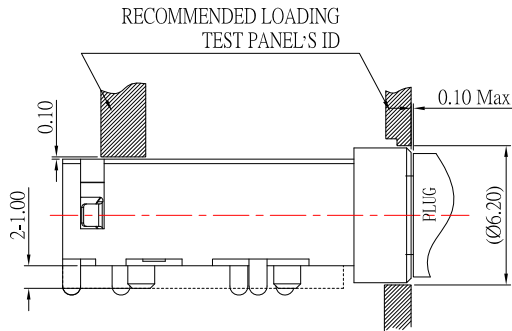

H	SEPARATOR	1	PA10T	BLACK
G	MAKE TERMINAL	1	PHOSPHOR BRONZE	GOLD FLASH PLATING ON CONTACT AREA; GOLD FLASH PLATING ON SOLDER TAILAREA; AND NICKEL UNDER PLATING.
F	TRANSFER TERMINAL	1	PHOSPHOR BRONZE	
E	TIP SPERING	1	PHOSPHOR BRONZE	
D	RING-A	1	PHOSPHOR BRONZE	
C	EARTH	1	PHOSPHOR BRONZE	
B	RING-B	1	PHOSPHOR BRONZE	
A	BODY	1	PA10T	BLACK
NO.	DFSCRIPTION	QTY	MATFRIAL	PLATING & COLOR

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	06/26/26	FINISH	MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-T32319A-S457
Jacky Chen	06/26/26	1 : 1	PART NO.	PJ-T32319A-S457
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	06/26/26			

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------