

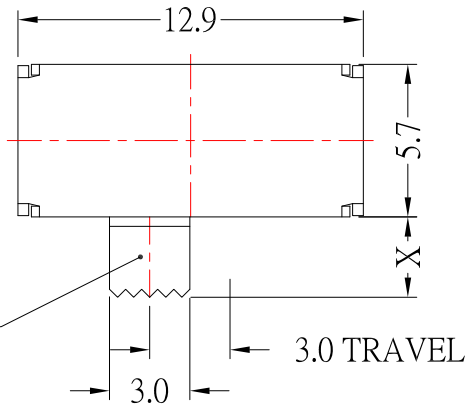
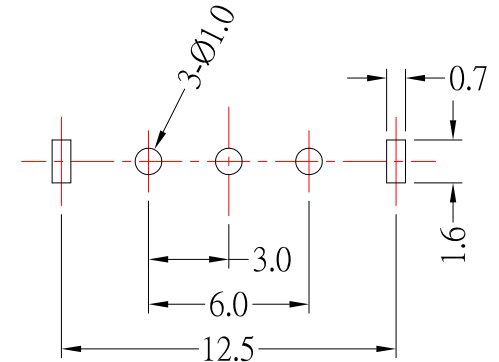


SCHEMATIC

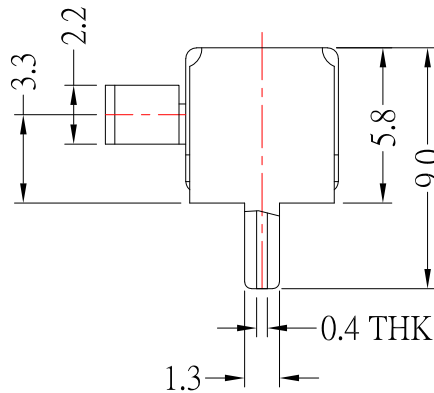

P.C.B LAYOUT
BOTTOM VIEW

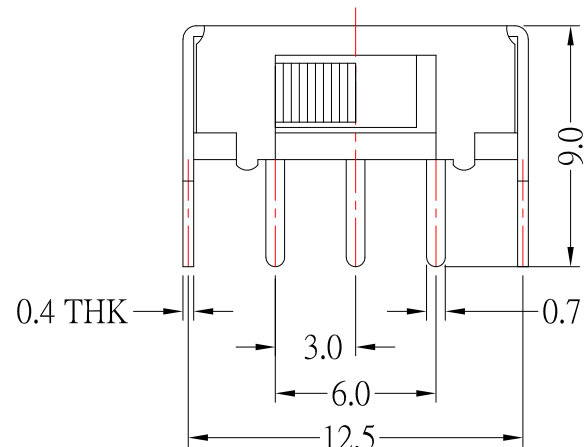

Model No.	X(mm)
SK-12F14-GC2	2mm
SK-12F14-GC3	3mm
SK-12F14-GC4	4mm
SK-12F14-GC5	5mm
SK-12F14-GC6	6mm
SK-12F14-GC7	7mm
SK-12F14-GC8	8mm
SK-12F14-GC9	9mm

SPECIFICATIONS

Rating	DC 12V, 3.0A
Circuit	1P - 2T
Contact Resistance	30mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	250gf ±100gf
Operating Life (cycles)	10,000

6	SPRING	1	STEEL WIRE	Ni-Plated
5	CONTACT	1	BRASS	Ag-Plated
4	TERMINAL	3	BRASS	Ag-Plated
3	BASE	1	PHENOL IC RESIN	Natural
2	KNOB	1	PA66	Black
1	FRAME	1	SPCC	Ni-Plated
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 04/22/26

CHECKED BY: Jacky Chen
DATE: 04/22/26

APPROVED BY: Tony Kao
DATE: 04/22/26

MAT'L

FINISH

SCALE

1 : 1

DWG NO.

PART NO.

TITLE

MODLE

SK-12F14-GC_x-S191

SWITCH

SLIDE SWITCH

SK-12F14-GC_x-S191

SIZE
A4
VER
R