

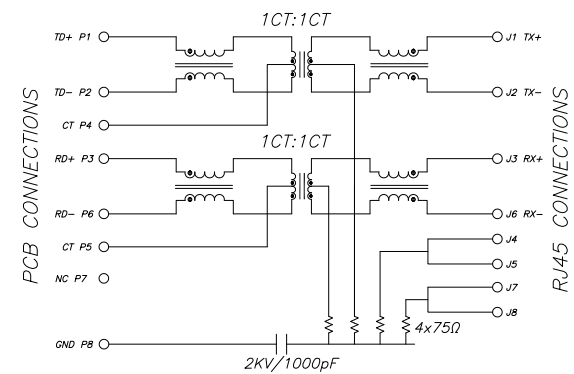
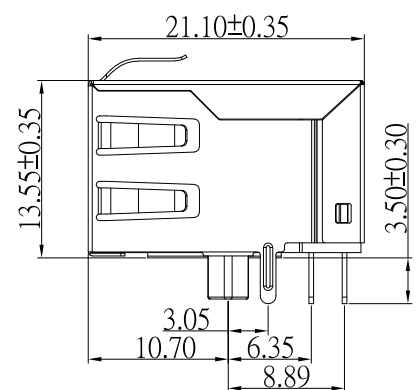

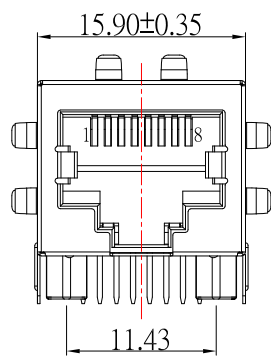




SCHEMATIC

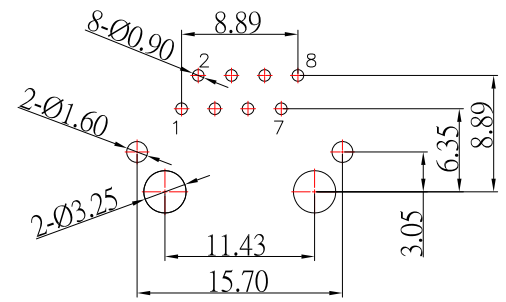

PCB LAYOUT

ELECTRICAL SPECIFICATIONS AT 25°C

INSERTION LOSS db max	Return Loss dB min				Crosstalk (dB TYP)			Common Mode Rejection (dB TYP)		Hpot (vrms)
	1-100MHz	1-30MHz	30-60MHz	60-80MHz	1-30MHz	30-60MHz	60-80MHz	1-50MHz	50-150MHz	
-1.0	-18	-16	-12	-30	-30	-30	-30	-30	-30	1500

Material:

- 1.Housing : PBT,Black
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Shield : SUS , Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
- 2.Storage Temperature : -40°C ~ +85°C