
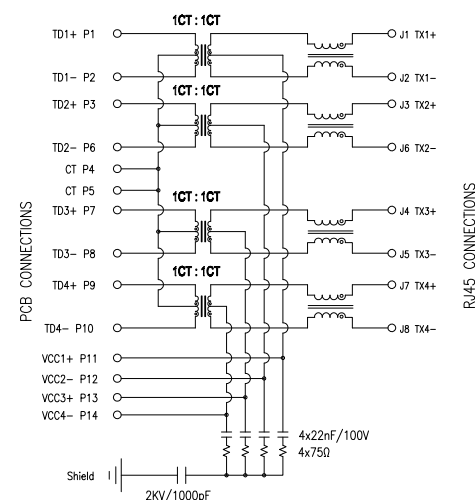
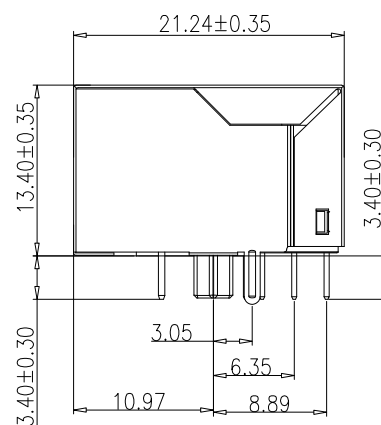


Standard led color	Led wavelength	Foward(V MAX)	Typcal(V TYP)	Luminous Intensity
Green	560-580nm	2.5V	2.1-2.2V	9-25 MCD
Yellow	580-610nm	2.5V	2.1-2.2V	9-30 MCD

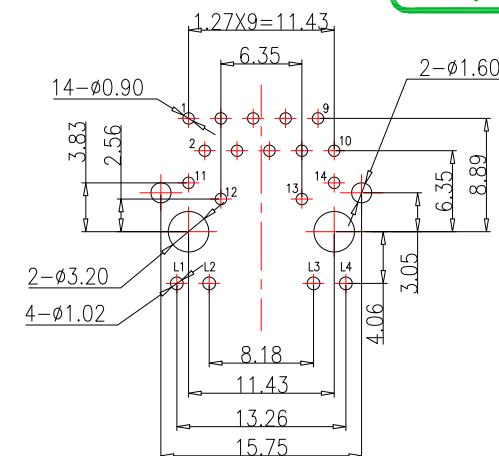

Insertion Loss dB max	Return Loss dB min			Crosstalk(dB TYP)			Common Mode Rejection (dB TYP)		Hipo(m)
1-100MHz	1-30MHz	30-60MHz	60-80MHz	1-30MHz	30-60MHz	60-80MHz	1-50MHz	50-150MHz	
-1.0	-18	-16	-12	-40	-35	-30	-30	-20	

Material:

- 1.Housing : PBT,Black
- 2.Terminal : Phosphor Bronze , Gold Plating over Nickel
- 3.Shield : Brass , Nickel Plated
- 4.Terminal Bracket : PBT,Black

Environmental:

- 1.Operation Temperature : -40℃ ~ +85℃
2.Storage Temperature : -40℃ ~ +85℃

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle ± 0.2 ± 0.3 ± 0.4 ± 0.5 ± 0.3° 3RD. ANGEL'S  UNITS MM	DRAWN BY: DATE		MAT'L		TITLE	RJ45	
					Jack Lu	02/03/26	FINISH		MODLE	RJ45+TRANSFORMER 100 1000 BASE WITH LED	
					CHECKED BY: DATE						
					Jacky Chen	02/03/26	SCALE	1 : 1	DWG NO.	MJ45-111Q177-GY-S307	SIZE A4
					APPROVED BY: DATE		SHEET NO.	1 of 1	PART NO.	MJ45-111Q177-GY-S307	VER R
ITEM NO.	DESCRIPTION	DRAWN	DATE	Tony Kao	02/03/26						