

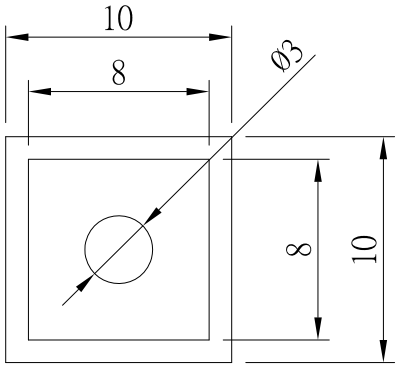




CIRCUIT DIAGRAM

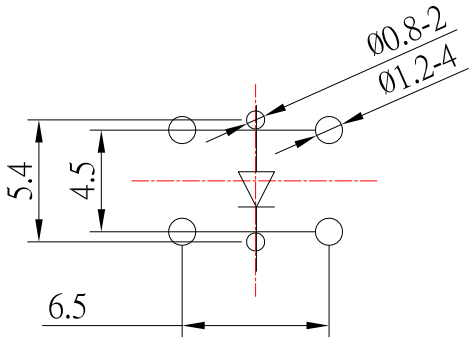



MOUNTING PATTERN

RoHS Compliant

COLOR OF LED

0	Without	1	Red
2	Green	3	Orange
4	Yellow	7	Blue
8	White		

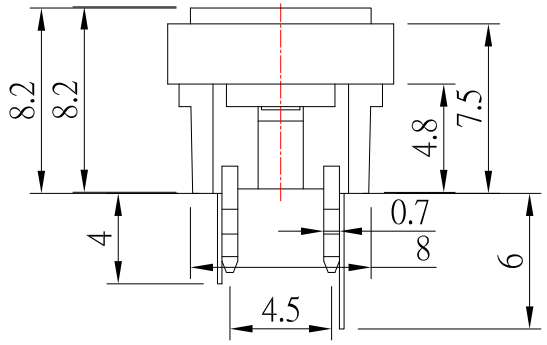

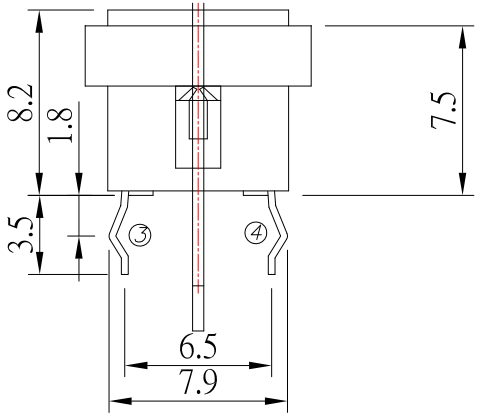

CAP Color

0	Without	1	Red
2	Green	3	Yellow
4	Ivory	5	Gray
6	Black		

Housing Color

0	Without
5	Gray
6	Black

SPECIFICATIONS

1. Rating: 12VDC 50mA.
2. Operating force: 200±50gf.
3. Contact resistance:100m ohm(Max).
4. Operating life: 100,000 cycles.
5. Total travel:0.25±0.1mm

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增 LED和CAP和HOUSING 的COLOR	Jack	051514

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS | MM

DRAWN BY: Jack Lu	DATE 05/15/14	MAT'L	
CHECKED BY: Jacky Chen	DATE 05/15/14	FINISH	
APPROVED BY: Tony Kao	DATE 05/15/14	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	SWITCH		
MODLE	TACT SW WITH LED		
DWG NO.	TS-x-Ax-Bx	SIZE	A4
PART NO.	TS-x-Ax-Bx	VER	R1