

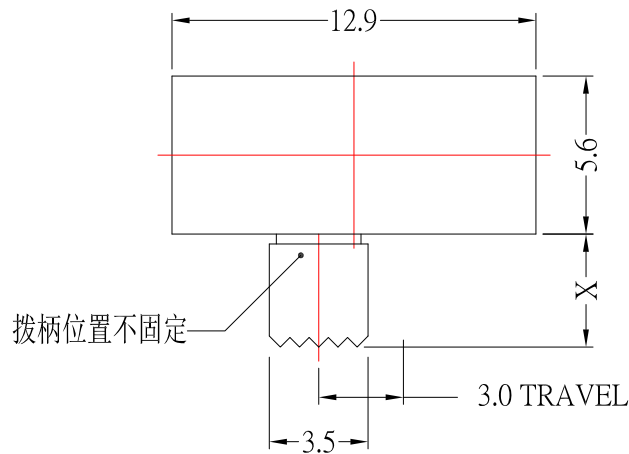
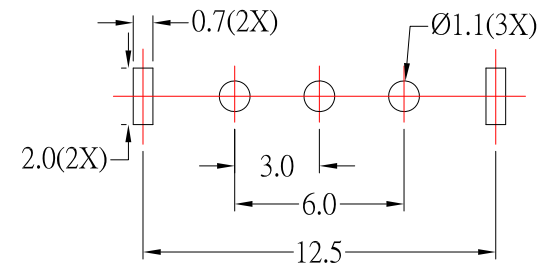


SCHEMATIC

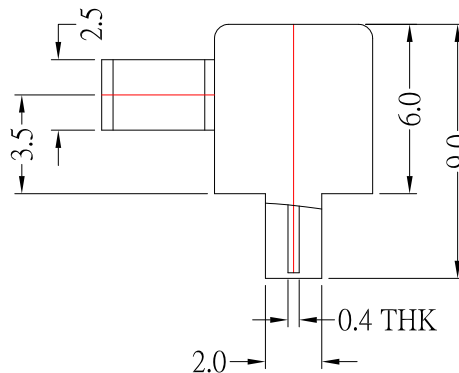

P.C.B LAYOUT

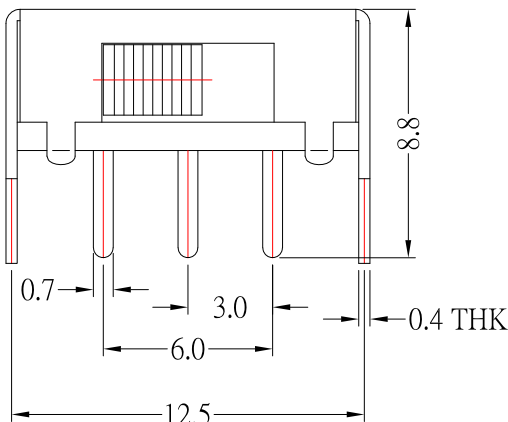

MODEL NO.	X(mm)
SK-12E14A-GA2-S19I	2mm
SK-12E14A-GA3-S19I	3mm
SK-12E14A-GA4-S19I	4mm
SK-12E14A-GA5-S19I	5mm
SK-12E14A-GA6-S19I	6mm
SK-12E14A-GA7-S19I	7mm
SK-12E14A-GA8-S19I	8mm
SK-12E14A-GA9-S19I	9mm

SPECIFICATIONS

Rating	DC 50V 0.5A
Circuit	1P - 2T
Timing	Non - Shorting
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	350gf ±100gf
Operating Life (cycle)	10,000 Min.

6	Spring	1	Stainless Steel	Natural
5	Contact	1	Brass	Ag-Plating
4	Terminal	3	Brass	Ag-Plating
3	Base	1	Phenolic Resin	Natural
2	Frame	1	SPCC	Ni-Plating
1	Knob	1	PA66	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

5	更新圖面	Jack	021425
4	更新撥柄位置	Jack	082417
3	更新圖面尺寸	Jack	030515
2	新增SPEC	Jack	111914
1	更新材質	Jack	061913
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	02/14/25	FINISH	MODLE	SLIDE SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	SK-12E14A-GAx-S19I
Jacky Chen	02/14/25	1 : 1	PART NO.	SK-12E14A-GAx-S19I
APPROVED BY:	DATE	SHEET NO.	1 of 1	VER R5
Tony Kao	02/14/25			