

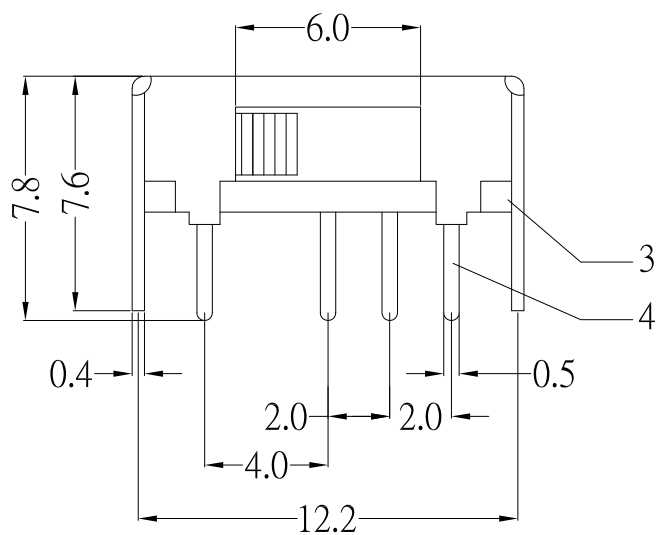
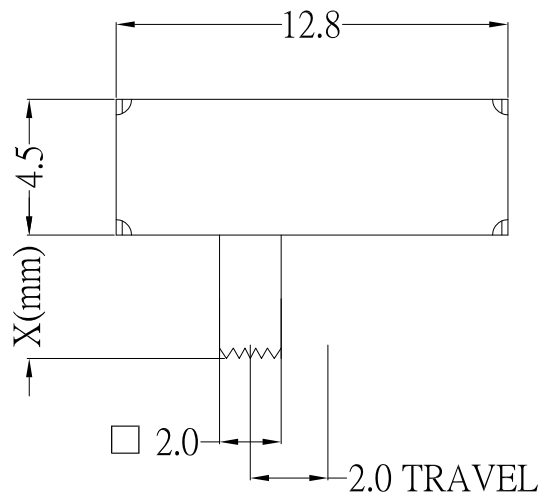



DIMENSIONS

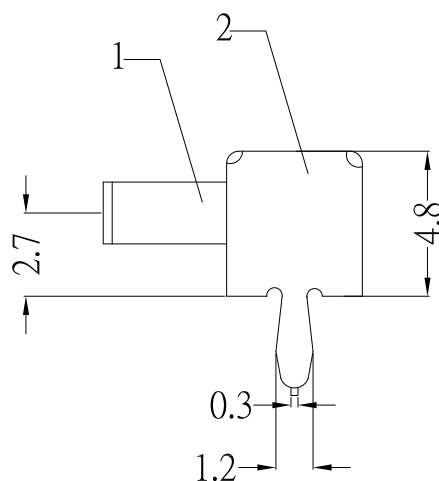

SCHEMATIC



P.C.B MOUNTING PATTERN

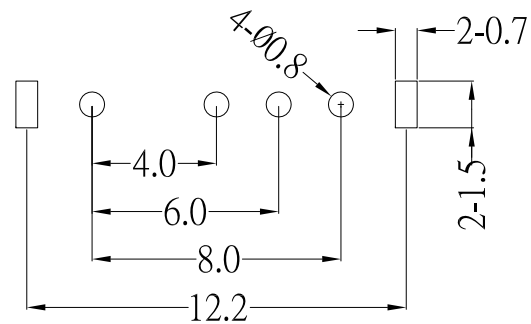

Model No.	X(mm)
SK-13D01-G2	2mm
SK-13D01-G3	3mm
SK-13D01-G4	4mm
SK-13D01-G5	5mm
SK-13D01-G6	6mm
SK-13D01-G7	7mm
SK-13D01-G8	8mm
SK-13D01-G9	9mm



SPECIFICATIONS

Rating	DC 50V 0.3A
Circuit	1P - 3T
Timing	Shorting
Contact Resistance	200m Ω Max.
Insulation Resistance	100M Ω Min.
Operating Force	250gf $\pm$ 100gf
Operating Life (cycles)	10,000

6	CONTACT CLIP	1	PHOSPHOR BRONZE	Ag-Plated		
5	SPRING	1	STAINLESS STEEL			
4	TERMINAL	4	BRASS	Ag-Plated		
3	BASE	1	PHENOLIC RESIN	Natural		
2	FRAME	1	SPCC	Ni-Plated		
1	KNOB	1	POM	Black		
NO.	DESCRIPTION	QTY	MATERIAL	REMARK		
DRAWN BY: Jack Lu	DATE 11/19/14	MAT'L		TITLE SWITCH		
CHECKED BY: Jacky Chen	DATE 11/19/14	FINISH		MODLE SLIDE SWITCH		
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	SK-13D01-Gx-S191	SIZE A4
Tony Kao	11/19/14	SHEET NO.	1 of 1	PART NO.	SK-13D01-Gx-S191	VER A1

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD.
ANGEL'S

	UNITS
--	-------

	MM
--	----

3	更新Contact Resistance	Jack	111914
2	更新為A0版	Jack	091114
1	更新材質及鍍層	Jack	060313
ITEM NO.	DESCRIPTION	DRAWN	DATE