

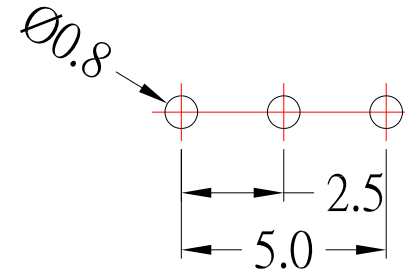


SCHEMATIC

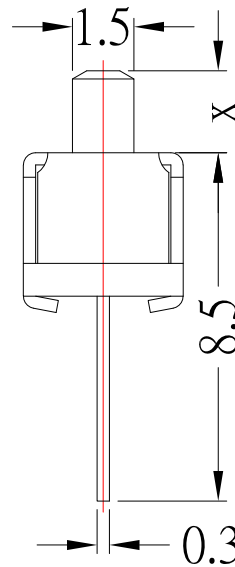

P.C.B LAYOUT

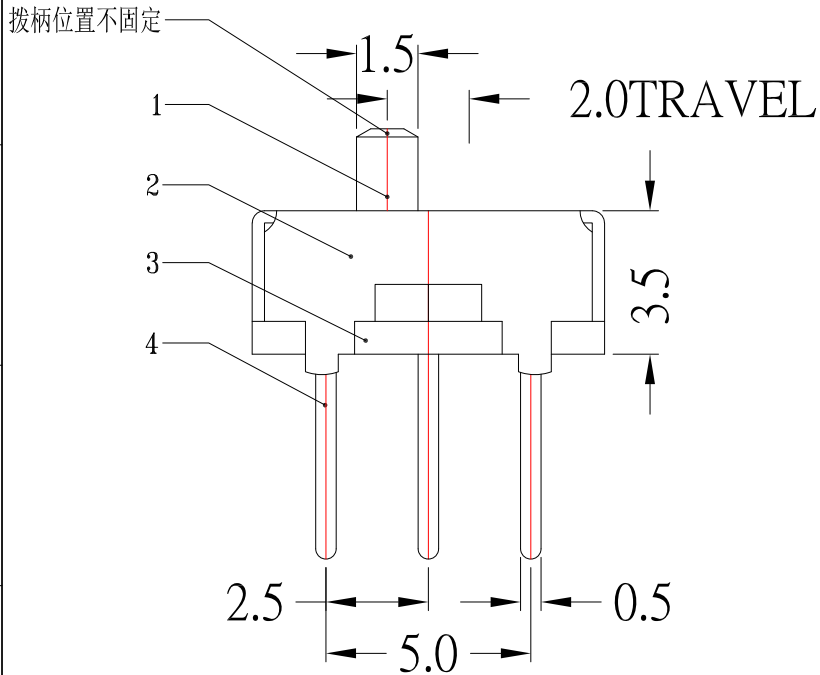

Model No.	X(mm)
SS-12D01-G2	2mm
SS-12D01-G3	3mm
SS-12D01-G4	4mm
SS-12D01-G5	5mm
SS-12D01-G6	6mm
SS-12D01-G7	7mm
SS-12D01-G8	8mm
SS-12D01-G9	9mm

SPECIFICATIONS

Rating	1.0A 28V DC
FUNCTION	1P2T
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	200gf ± 80gf
Operating Life	10,000 cycle

7	更新圖面	Jack	032025
6	更新圖面樣式	Jack	101515
5	更新MODLE	Jack	052915
4	新增SPEC	Jack	111914
3	更新3.9mm的尺寸為4.0mm	Jack	111414
2	新增3.9mm的尺寸	Jack	111214
1	更新尺寸及材質	Jack	031714
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
--	--	-----------------	--	-------	----

5	CONTACT CLIP	1	PHOSPHOR BRONZE	Ag-Plated
4	TERMINAL	3	BRASS	Ag-Plated
3	TERMINAL BASE	1	PHENOL IC RESIN	Natural
2	FRAME	1	SPCC	Ni-Plated
1	KNOB	1	POM	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK
DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	03/20/25	FINISH	MODLE	SLIDE SWITCH 1P2T 端子腳 L:5.0mm
CHECKED BY:	DATE	SCALE	DWG NO.	SS-12D01-Gx-S191
Jacky Chen	03/20/25	1 : 1	SS-12D01-Gx-S191	SIZE A4
APPROVED BY:	DATE	SHEET NO.	PART NO.	VER
Tony Kao	03/20/25	1 of 1	SS-12D01-Gx-S191	R7