

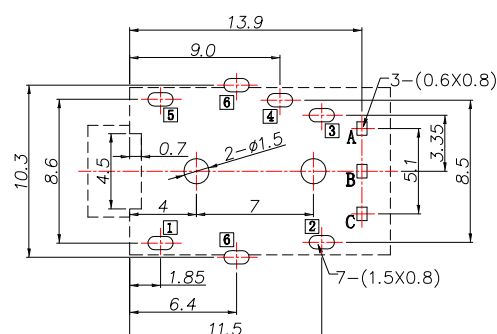
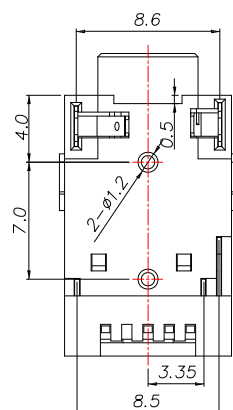
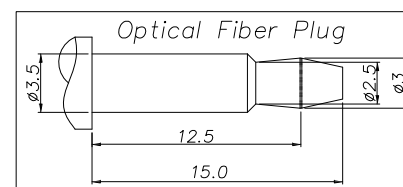
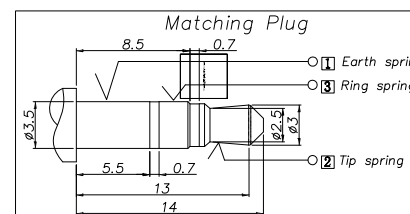
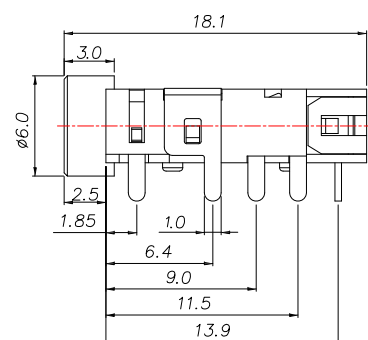


OJ-0001A-xx x xx-S141



P.C.B LAYOUT MOUNTING PATTERN
(COPPER-SIDED VIEW)



SPECIFICATION

1. Rating : DC 30V 0.5A
2. Contact resistance : $\leq 30\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

⑩	Fiber	1		
⑨	Shell ⑥	1	Brass	Nickel Plating
⑧	Make terminal ⑤	1	Phosphor bronze	
⑦	Transfer terminal ④	1	Phosphor bronze	
⑥	Ring spring ③	1	Phosphor bronze	
⑤	Tip spring ②	1	Phosphor bronze	
④	Earth spring ①	1	Phosphor bronze	
③	Cover	1	PA9T	
②	Housing(B)	1	PA9T	
①	Housing(A)	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

Model No.	OJ-0001A-xxx00	OJ-0001A-xxxT0	OJ-0001A-xxxR0
Schematic			

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3° 3RD. ANGEL'S  UNITS MM					DRAWN BY: DATE		MAT'L		TITLE JACK		
									CHECKED BY: DATE		FINISH		MODLE OPTICAL JACK		
									APPROVED BY: DATE		SCALE 1 : 1		DWG NO. OJ-0001A-xx x xx-S141		SIZE A4
1	更新料號	Jack	062218											SHEET NO. 1 of 1	
ITEM NO.	DESCRIPTION	DRAWN	DATE												