

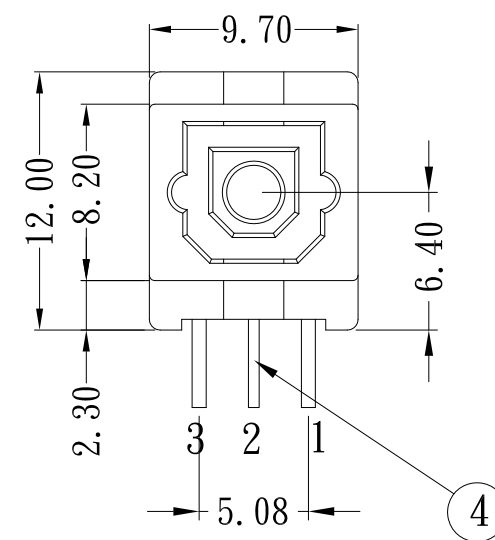
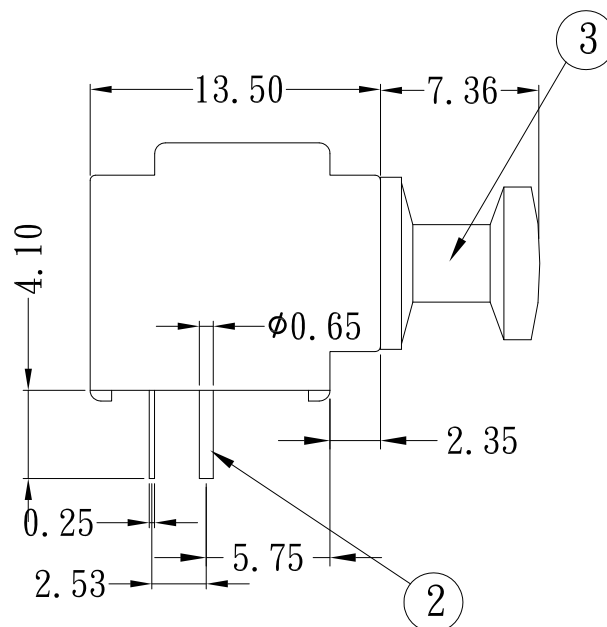


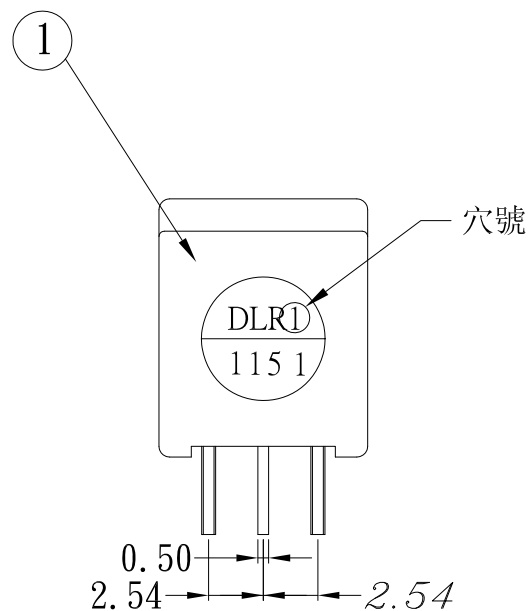

Pin Function:
1. Gout
2. GND
3. Vcc

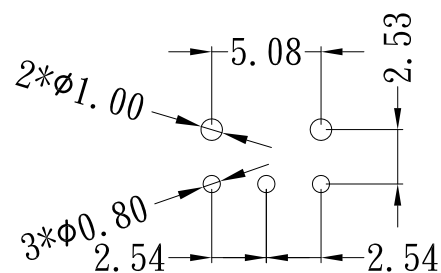

PCB LAYOUT

NO	PART NAME	QTY	MATERIAL	REMARK
1	BODY	1	PBT+15%GF	
2	PIN	2	BRASS	PLATED TIN
3	PLUG	1	PBT+15%GF	
4	IR	1	PHOSPHOR BRONZE	PLATED TIN , TRANSMITTER



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
01/30/13
DATE
01/30/13
DATE
01/30/13

MAT'L
FINISH
SCALE

1 : 1

TITLE
MODLE
DWG NO.

JACK
OPTICAL JACK (接收端)
OJ-1151AR-S215

SIZE
A4
VER
R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新材質及鍍層	Jack	013013