

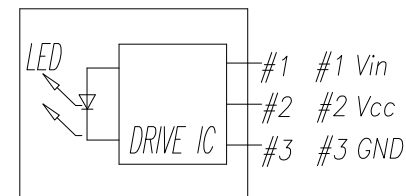


Recommend PCB Layout
(Jack Top View)

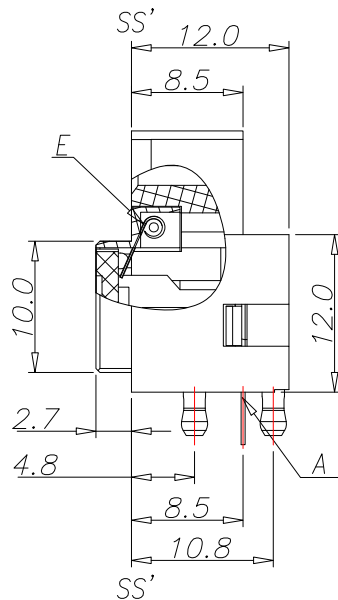

Internal equivalent circuit

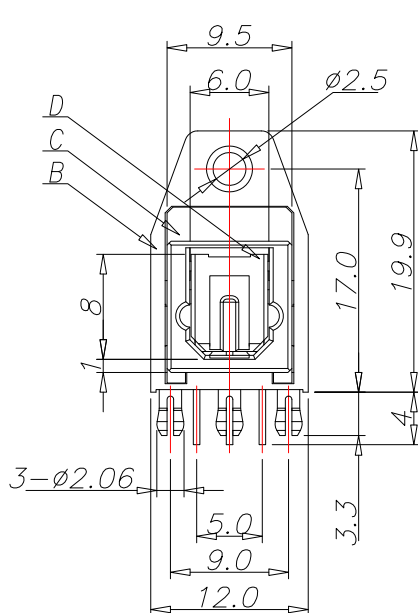

SPECIFICATION

1. Voltage Rating: $V_{cc}=0.5\sim 7V$, $V_{in}=-0.5\sim 7.5V$
2. Current Rating: 10mA
3. Insertion Force: 2.5Kgf Max.
4. Extraction Force: 0.5Kgf Min.
5. Life test: 1,500 cycles
6. Temperature Range: $-20^{\circ}C\sim 70^{\circ}C$

E	Coil Spring	1	STEEL	
D	Shutter	1	PBT,UL94 V-0	Black
C	Case	1	PBT,UL94 V-0	Black
B	Housing	1	PBT,UL94 V-0	Black
A	DRIVE IC	1	16Mbps(DRIVE IC SPEC)	
NO.	PART NAME	Q'TY	DESCRIPTION	PLATING & COLOR

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	07/01/16	FINISH	MODLE	OPTICAL JACK(發射端)
CHECKED BY:	DATE	SCALE	DWG NO.	OJ-B5018A-03DB-S214
Jacky Chen	07/01/16	1 : 1	PART NO.	OJ-B5018A-03DB-S214
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	07/01/16			

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新料號	Jack	070116