





Model NO.	DC-081HS-1.65	DC-081HS-2.0	DC-081HS-2.5
PIN(X)	φ1.65	φ2.0	φ2.5

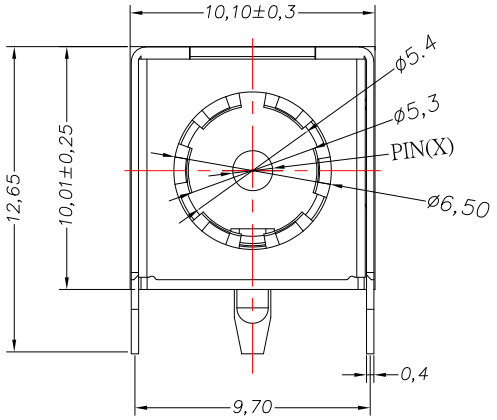


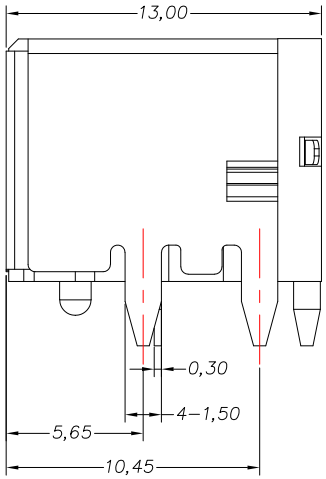



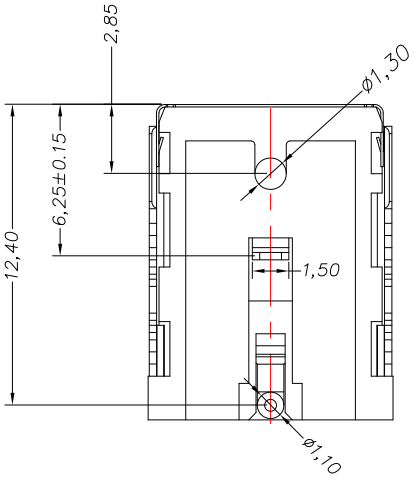

MODEL NO.	DC-081HS-x
SCHEMATIC	2 / 4 / 3

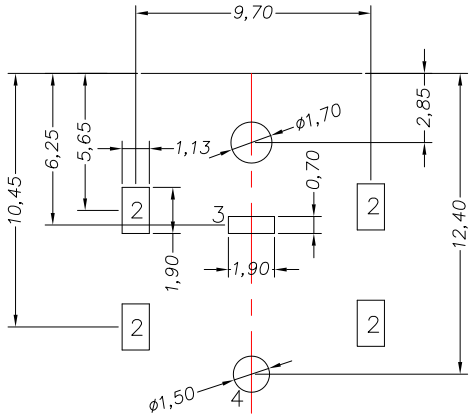

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

1.Rating ：DC 24V, 10.0A
2.Contact resistance：≤ 50mΩ
3.Insulation resistance：≥100MΩ
4.Withstand voltage：500VAC
5.Insertion and extraction force：3-30N
6.life test：5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
6	COVER	1	SUS	
5	SPACER	1	PA9T (BLACK)	
4	BERRY PIN	1	BRASS	Ni-Plating
3	CCAW	1	PHOSPHOR BRONZE	Tin Plated over Ni
2	FOOT COVERLET	1	SUS	Ni-Plating
1	HOUSING	1	PA9T (BLACK)	

ITEM NO.	DESCRIPTION	DRAWN	DATE
17	更新尺寸和材質和尺寸選項	Jack	122325
16	更新材質	Jack	082621
15	更新尺寸公差	Jack	082521
14	更新鍍層	Jack	053121
13	更新材質及鍍層	Jack	052821

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°
3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 12/23/25	MAT'L	
CHECKED BY: Jacky Chen	DATE 12/23/25	FINISH	
APPROVED BY: Tony Kao	DATE 12/23/25	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	JACK		
MODLE	DC JACK		
DWG NO.	DC-081HS-x-S214	SIZE	A4
PART NO.	DC-081HS-x-S214	VER	R17