

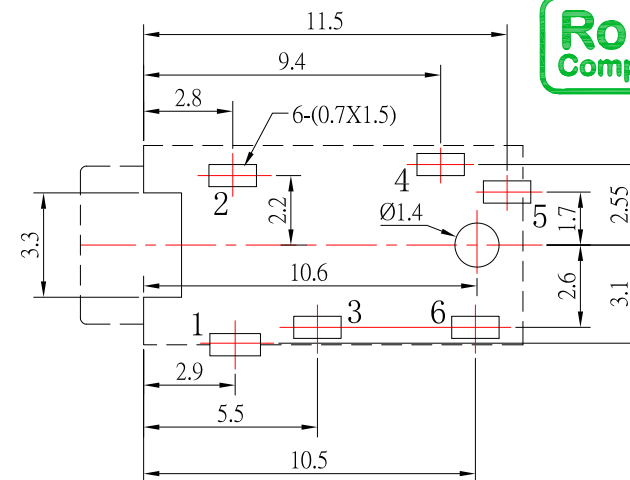
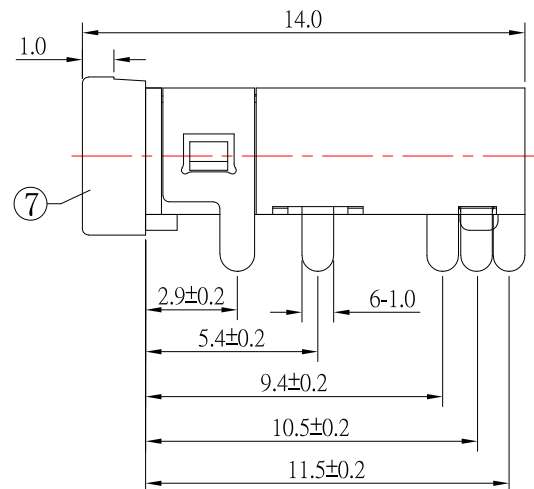
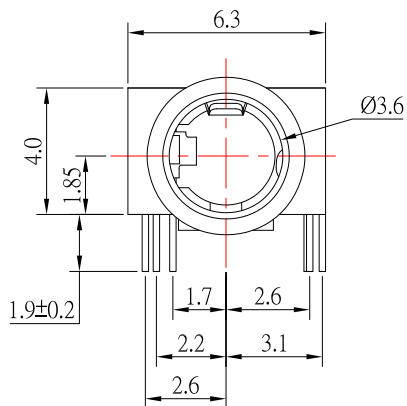



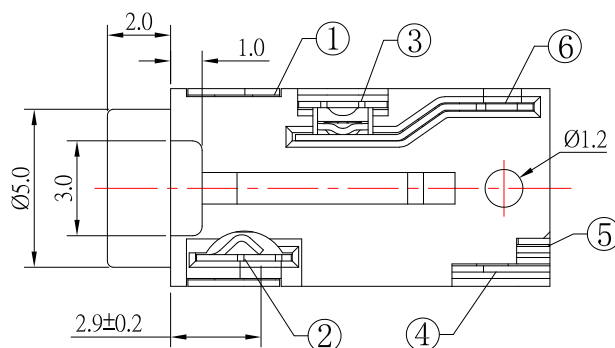

P.C.B LAYOUT
TOP VIEW

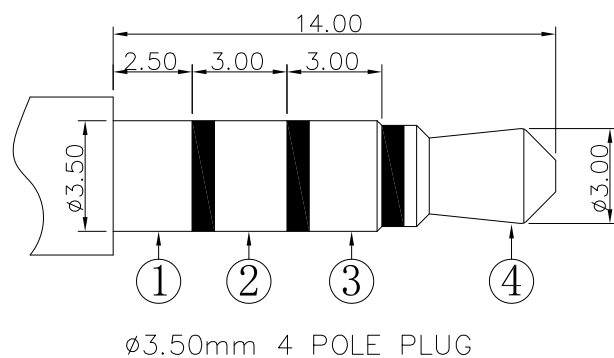

SPECIFICATION

- 1.Rating : DC 30V, 1.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

7	HOUSING	1	PA9T	
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

9	更新尺寸及材質	Jack	091324
8	更新SCHEMATIC選項	Jack	032222
7	更新尺寸及材質	Jack	061219
6	更新SCHEMATIC選項	Jack	041819
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

DATE

Jack Lu

09/13/24

CHECKED BY

DATE _____

▪	Jacky Chen
---	------------

09/13/24

APPROVED BY _____

DATE _____

MAT'L

FINISH

SCALE

SHEET M

TITLE

MODLE

DWG N

PART N

JACK

PHONE JACK

4. PJ-3956-S124

o. PJ-3956-S124

SIZE

	VER
	DO