


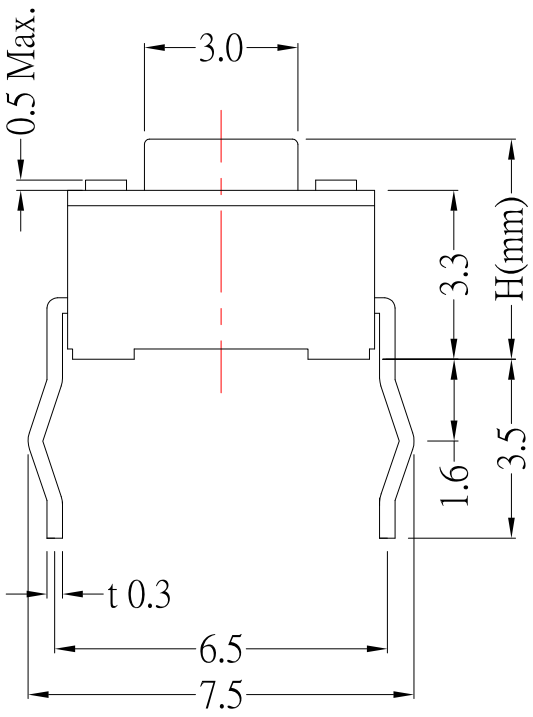


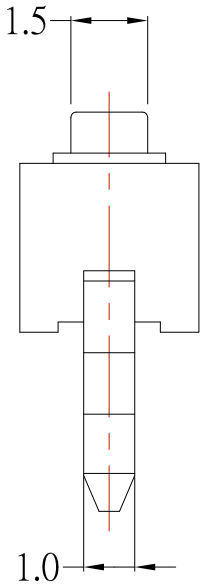




CIRCUIT DIAGRAM

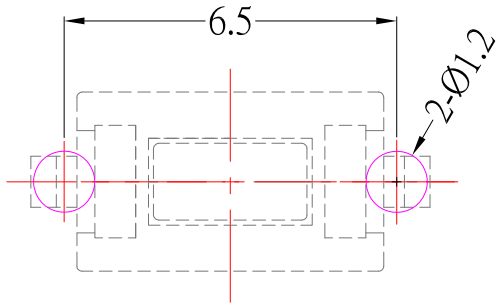

P.C.B LAYOUT MOUNTING PATTERN

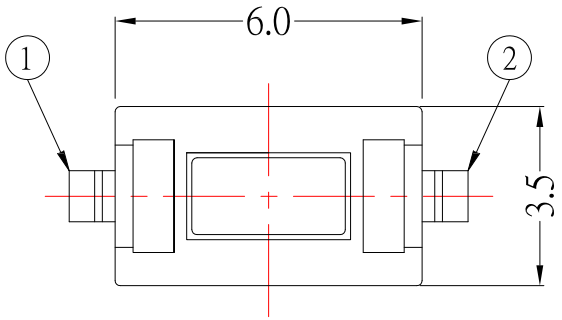

TS-A01x-xx-S126

	H(mm)
Blank	4.3
A	5.0

Operating Force

Stem Color :

Black: Blank
White : W
Red : R

SPECIFICATIONS

Rating	DC 12V 50mA Max.					
Contact Resistance	100mΩ Max.					
Travel	0.25 ± 0.1mm					
Operating Force	0	100±30gf	2	160±50gf	3	260±50gf
Operating Life (cycles)	50,000				30,000	

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	2	BRASS	Ag plated
D	CONTACT	1	SUS	Ag plated
C	COVER	1	BRASS	
B	CASE	1	PA6T(Black)	
A	STEM	1	PA6T	

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	新增顏色選項	Jack	070325
3	新增顏色選項	Jack	101322
2	新增材質表	Jack	080320
1	新增Operating Force:100±30gf	Jack	050417

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2, Above 5 ~ 15 ±0.3, Above 15 ~ 30 ±0.4, Above 30 ~ 50 ±0.5, Angle ±0.3°

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 07/03/25	MAT'L	
CHECKED BY: Jacky Chen	DATE 07/03/25	FINISH	
APPROVED BY: Tony Kao	DATE 07/03/25	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	SWITCH		
MODLE	TACT SWITCH		
DWG NO.	TS-A01x-xx-S126	SIZE	A4
PART NO.	TS-A01x-xx-S126	VER	R4