
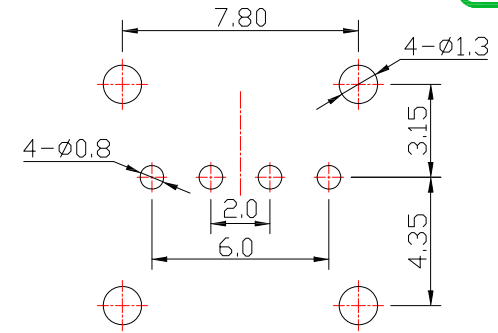
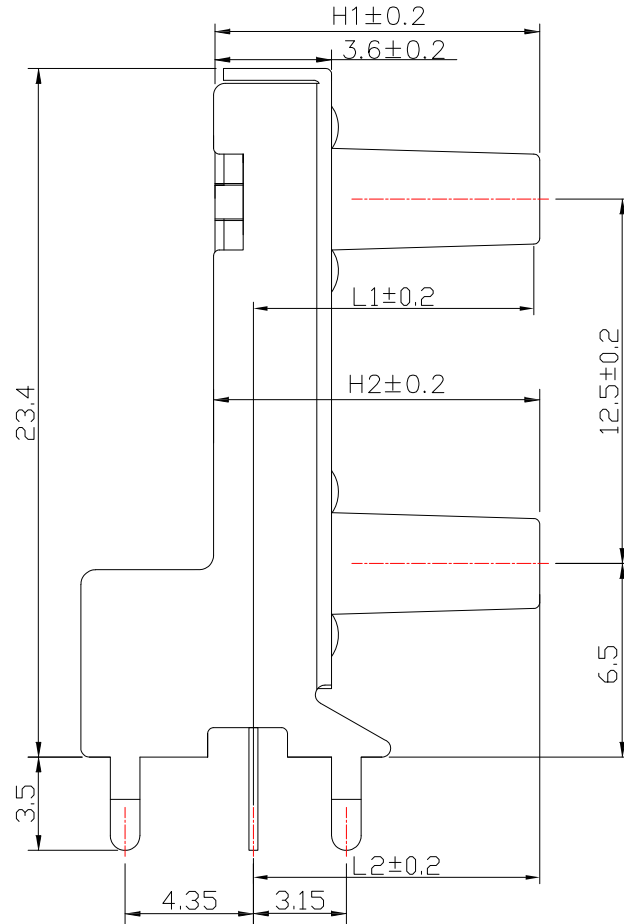



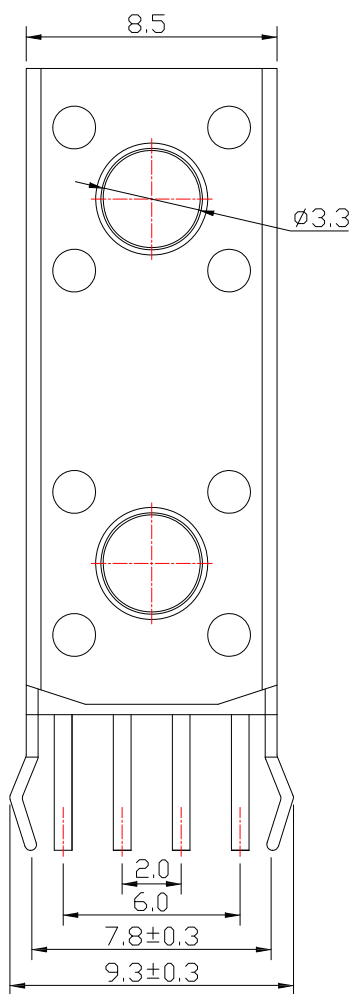


P.C.B LAND PATTERN

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max.
Travel	0.30 ± 0.10mm
Operating Force	2 160 ± 50gf 3 260 ± 50gf
Operating Life (cycles)	100,000

TS-A02MVxx-x-S428



CIRCUIT DIAGRAM

KNOB HEIGHT

MODEL	L1(mm)	H1(mm)
A	3.85	5.00
D	8.35	9.50

Operating Force

KNOB HEIGHT

MODEL	L2(mm)	H2(mm)
A	3.85	5.00
D	8.35	9.50

E	STEM	2	PA66(Black)	
D	COVER	1	SPCC	
C	CONTACT	2	SUS	Ag plated
B	THERMINAL	4	BRASS	Ag plated
A	BASE	1	PA66(Black)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MATL	TITLE	SWITCH
Jack Lu	05/28/20			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH
Jacky Chen	05/28/20			
APPROVED BY:	DATE	SCALE	DWG NO.	TS-A02MVxx-x-S428
Tony Kao	05/28/20	1 : 1		
		SHEET NO.	PART NO.	TS-A02MVxx-x-S428
				SIZE A4
				VER R1