



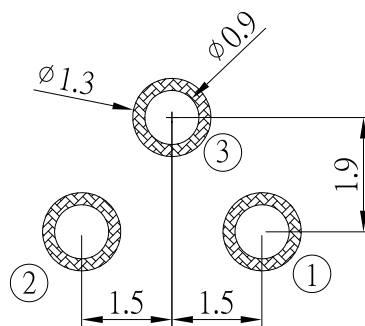

PCB LAYOUT




CIRCUIT DIAGRAM

MODEL NO.	H(mm)
TS-A09V	3.8
TS-A09VA	4.3
TS-A09VB	4.8
TS-A09VC	5.0
TS-A09VD	6.0
TS-A09VE	7.0

SPECIFICATIONS

Rating	DC 12V 0.05A.			
Insulation Resistance	50 M Ω Min.			
Contact Resistance	100 m Ω Max.			
Operating Force	2	160 $\pm$ 50gf	3	260 $\pm$ 50gf
Operating Life (cycles)	80,000			
Travel	0.15 $\pm$ 0.1mm			



E	TERMINAL	2	BRASS	Ag plated
D	CONTACT	1	SUS	Ag plated
C	COVER	1	BRASS	Ag plated
B	BASE	1	PA6T	Black
A	STEM	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP TOLERANCE UNLESS OTHERWISE STATED : Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle ±0.2 ±0.3 ±0.4 ±0.5 ±0.3° 3RD. ANGEL'S  UNITS MM
5	更新材質	Jack	082223	
4	更新樣式	Lan	042319	
3	更新尺寸	Jack	010516	
2	新增尺寸及PIN腳標示	Jack	021015	
1	新增Travel	Jack	103114	
ITEM NO.	DESCRIPTION	DRAWN	DATE	
A	B	C	D	E

DRAWN BY:	DATE	MAT'L		TITLE	SWITCH	
Jack Lu	08/22/23					
CHECKED BY:	DATE	FINISH		MODLE	TACT SWITCH	
Jacky Chen	08/22/23	SCALE	1 : 1	DWG NO.	TS-A09V _{x-x} -S246	SIZE A4
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	TS-A09V _{x-x} -S246	VER R5
Tony Kao	08/22/23					