

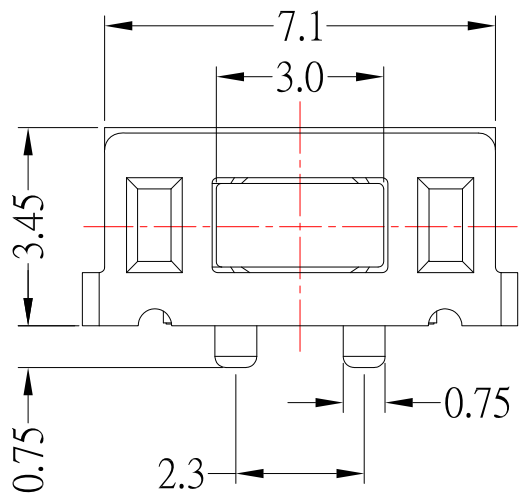
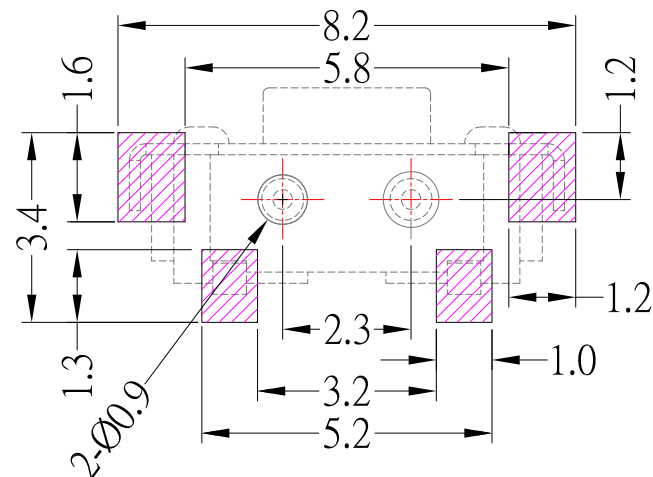


CIRCUIT DIAGRAM

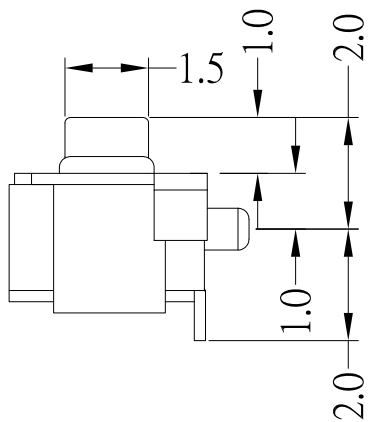

P.C.B MOUNTING PATTERN DIMENSION

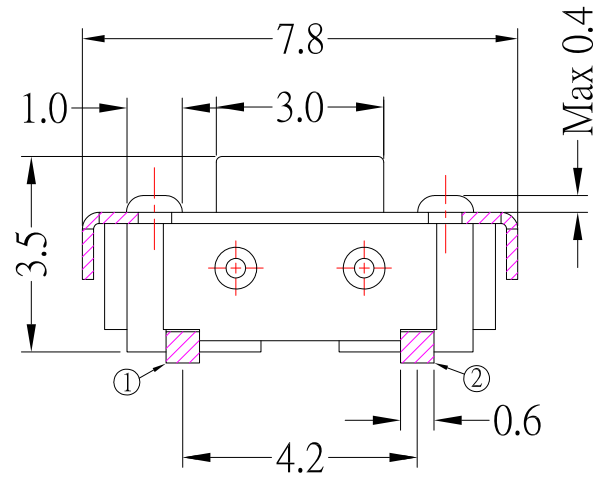

SPECIFICATIONS

Rating	DC 12V 50mA Max.					
Circuit	1C - 1P					
Contact Resistance	100mΩ Max.					
Travel	0.25 ± 0.1mm					
Operating Force	0	100 ± 30gf	1	130 ± 30gf	2	160 ± 50gf
Operating Life (cycles)	50,000			30,000		30,000

E	TERMINAL	2	BRASS	Ag plated
D	CONTACT	1	SUS	Ag plated
C	COVER	1	BRASS	Ag plated
B	CASE	1	LCP	
A	STEM	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

6	新增Operating Force選項	Jack	120525
5	新增材質表	Jack	080520
4	更新尺寸	Jack	091718
3	更新為A0版	Jack	081815
2	新增OF選項	Jack	080613
1	圖面更新	FrankWu	022412
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	08/05/20			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH
Jacky Chen	08/05/20			
APPROVED BY:	DATE	SCALE	DWG NO.	TS-A12E-x-S126
Tony Kao	08/05/20	1 : 1		
		SHEET NO.	PART NO.	TS-A12E-x-S126
		1 of 1		
				SIZE A4
				VER R6