

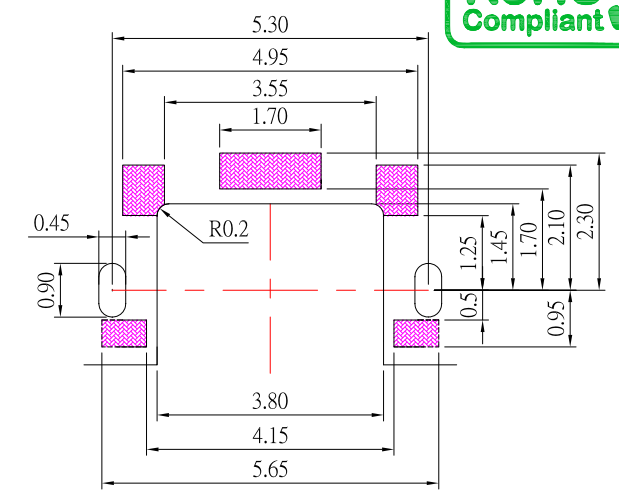
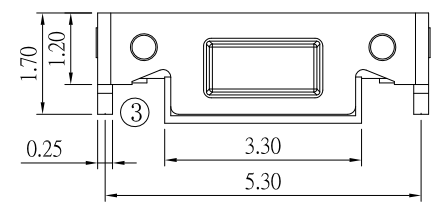


CIRCUIT DIAGRAM

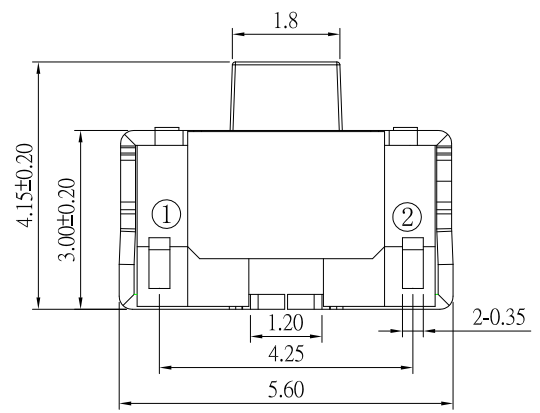

P.C.B LAND PATTERN



SPECIFICATIONS

Rating	50mA, 12V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V
Contact Resistance	100mΩ Max.
Operating Force	160 ± 40gf
Operating Life	50,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	THERMINAL	2	PHOSPHOR BRONZE	Ag plated
D	CONTACT	3	STAINLESS STEEL	Ag plated
C	COVER	1	PHOSPHOR BRONZE	Ag plated
B	BASE	1	LCP	White
A	STEM	1	LCP	White

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	01/10/22		MODLE	TACT SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	TS-A28- 2-S246
Jacky Chen	01/10/22	1 : 1	PART NO.	TS-A28- 2-S246
APPROVED BY:	DATE	SHEET NO.		
Tony Kao	01/10/22	1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新CONTACT數量	Jack	011022
3	更新規格	Jack	111921
2	新增COVER 鍍層	Jack	102121
1	更新材質顏色	Jack	102318