

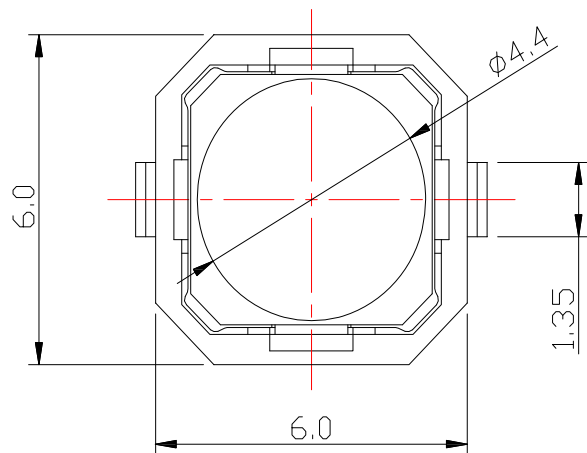
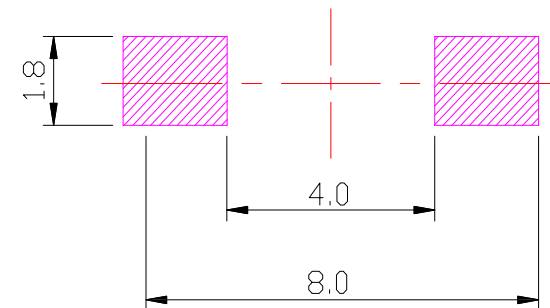


CIRCUIT DIAGRAM



P.C.B LAYOUT MOUNTING PATTERN

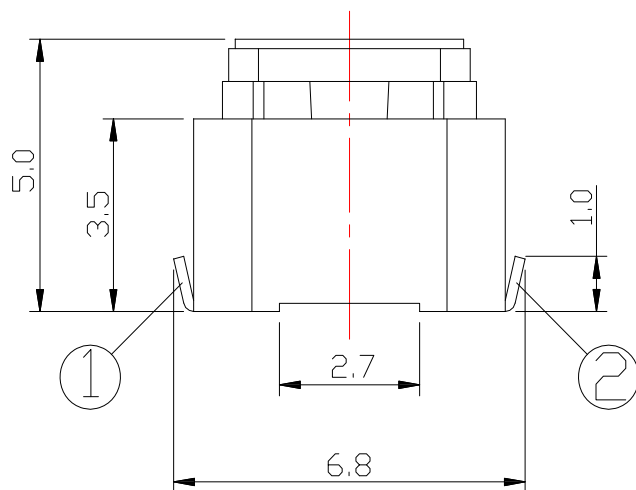

SPECIFICATIONS

Rating	DC 12V 50mA Max.		
Contact Resistance	100 mΩ Max.		
Travel	1.30± 0.1 mm		
Operating Force	3	250 ± 50gf	4 320 ± 50gf
Operating Life (cycles)	100,000		80,000

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新Operating Force选项	Jack	123125
1	新增Operating Force:320 ± 50gf	Jack	092618

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	12/31/25	FINISH	MODLE	
CHECKED BY:	DATE	SCALE	DWG NO.	
Jacky Chen	12/31/25	1 : 1	TS-A32USA-x-S138	
APPROVED BY:	DATE	SHEET NO.	PART NO.	SIZE
Tony Kao	12/31/25	1 of 1	TS-A32USA-x-S138	A4
				VER
				R2