


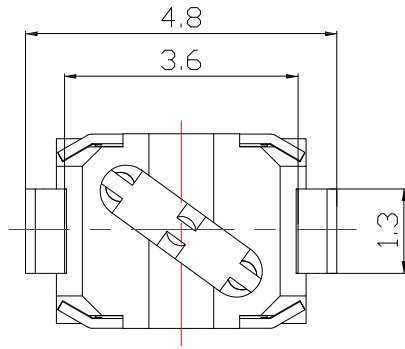




Model No.	L (mm)	Knob Color
TS-A85U	2.0	BLACK
TS-A85AU	2.5	BLACK
TS-A85GU	4.0	BLACK
TS-A85CU	7.0	BLACK





P.C.B. LAYOUT MOUNTING PATTERN

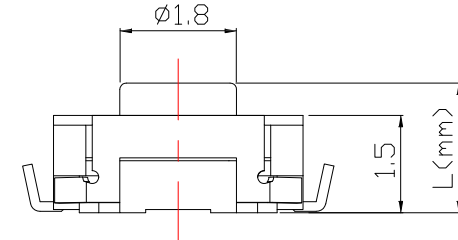

SPECIFICATIONS

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Travel	0.15 ± 0.1mm		
Operating Force	2 160±30gf	3 250±50gf	
Operating Life(cycles)	100,000		

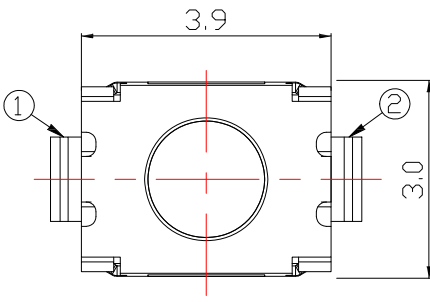

CIRCUIT DIAGRAM

F	DUST COVER	1	PI FILM	
E	TERMINAL	4	BRASS	Ag plated
D	CONTACT	1	SUS	Ag plated
C	COVER	1	SUS	
B	CASE	1	LCP	
A	STEM	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
	DRAWN BY:	DATE	MAT'L	TITLE
	Jack Lu	04/11/23		SWITCH
	CHECKED BY:	DATE	FINISH	MODLE
	Jacky Chen	04/11/23		TACT SWITCH
	APPROVED BY:	DATE	SCALE	DWG NO.
	Tony Kao	04/11/23	1 : 1	TS-A85xU-x-S126
			SHEET NO.	PART NO.
			1 of 1	TS-A85xU-x-S126
				SIZE
				A4
				VER
				R6

6	更新圖面	Jack	041123
5	新增材質表	Jack	080620
4	更新Knob Color	Jack	090516
3	更新高度選項	Jack	051916
2	更新travel	Jack	070815
1	刪除1.80高度選項	Jack	110714
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ± 0.2

Above 5 ~ 15 ± 0.3

Above 15 ~ 30 ± 0.4

Above 30 ~ 50 ± 0.5

Angle ± 0.3°

3RD. ANGEL'S

UNITS

MM