

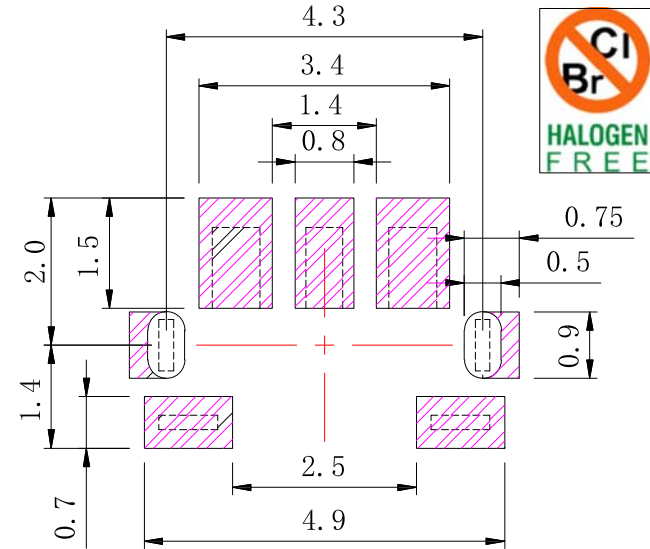
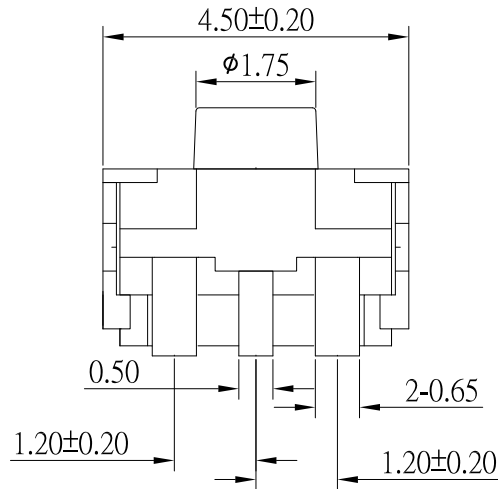
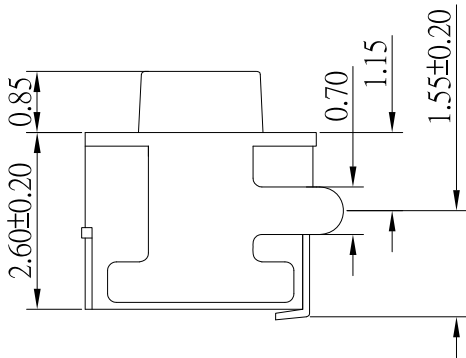


TS-AA2-xx-HF-S246

XX	Operating Force	STEM	COLOR
2	160 ± 50gf	Black	
3R	260 ± 50gf	RED	

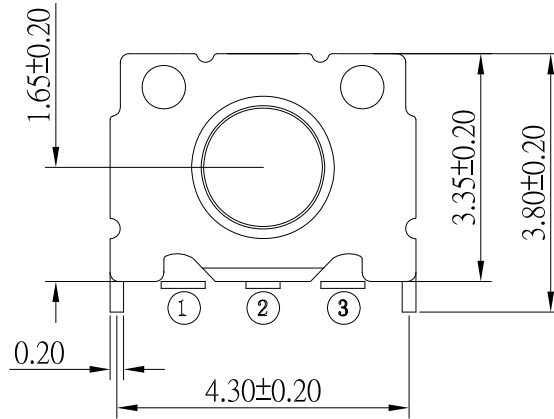

PCB LAYOUT



CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA.		
Insulation Resistance	100 MΩ Min.		
Contact Resistance	100 mΩ Max.		
Operating Force	2	160 ± 50gf	3 260 ± 50gf
Operating Life (cycles)	100,000		

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CONTACT	2	SUS	Ag plated
C	COVER	1	PHOSPHOR BRONZE	Ag plated
B	BASE	1	LCP	Black
A	STEM	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

12	更新選項編號	Jack	062624
11	更新PCB LAYOUT	Jack	121420
10	更新圖面	Jack	060320
9	更新料號新增UL94V-0	Jack	051820
ITEM NO.	DESCRIPTION	DRAWN	DATE



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	06/26/24			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH 無鹵/防火等級94V-0
Jacky Chen	06/26/24			
APPROVED BY:	DATE	SCALE	DWG NO.	TS-AA2-xx-HF-S246
Tony Kao	06/26/24	1 : 1		
SHEET NO.	1 of 1	PART NO.	TS-AA2-xx-HF-S246	
				SIZE A4
				VER R12