

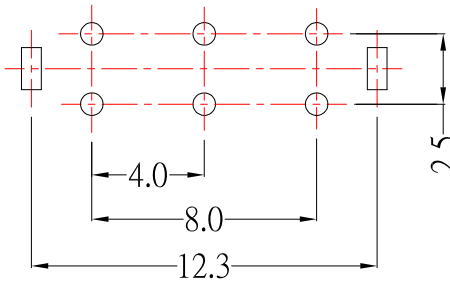


SCHEMATIC (NON-SHORTING)

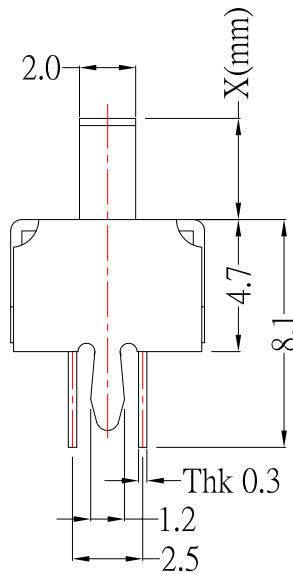

P.C.B MOUNTING PATTERN
(BOTTOM VIEW)

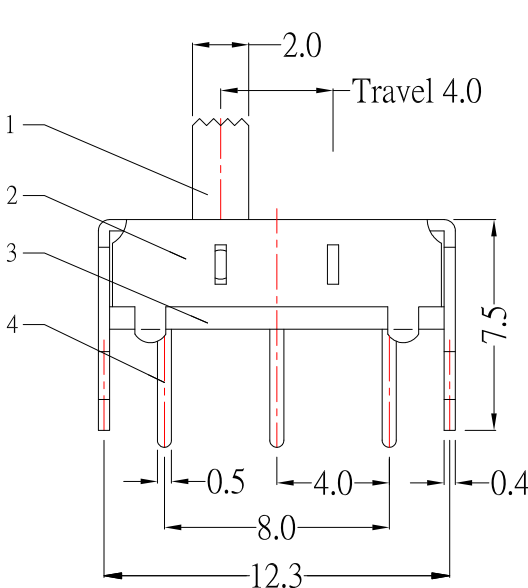

Model No.	X(mm)
SS-22H06-G2	2mm
SS-22H06-G3	3mm
SS-22H06-G4	4mm
SS-22H06-G5	5mm
SS-22H06-G6	6mm
SS-22H06-G7	7mm
SS-22H06-G8	8mm
SS-22H06-G9	9mm

SPECIFICATIONS

Rating	DC 50V 0.3A
Circuit	2P - 2T
Timing	Non - Shorting
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	300 ± 100gf
Operating Life (cycles)	10,000

6	SPRING PLATE	STAINLESS STEEL	4	NATURAL
5	CONTACT CAP	PHOSPHOR BRONZE	2	AG-CLAD
4	TERMINAL	PHOSPHOR BRONZE	12	AG PLATED OVER NI PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL	1	NI PLATED
1	KNOB	POM	1	BLACK
NO PART NAME		MATERIAL	QTY FINISHING	
DRAWN BY:		DATE	MAT'L	
Jack Lu		10/22/15	TITLE	
CHECKED BY:		DATE	FINISH	
Jacky Chen		10/22/15	MODLE	
APPROVED BY:		DATE	SCALE	
Tony Kao		10/22/15	1 : 1	
			DWG NO.	
			SS-22H06-Gx	
			PART NO.	
			SS-22H06-Gx	
			SIZE	
			A4	
			VER	
			R1	



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	± 0.3°				

1	新增SPEC	Jack	102215
ITEM NO.	DESCRIPTION	DRAWN	DATE