


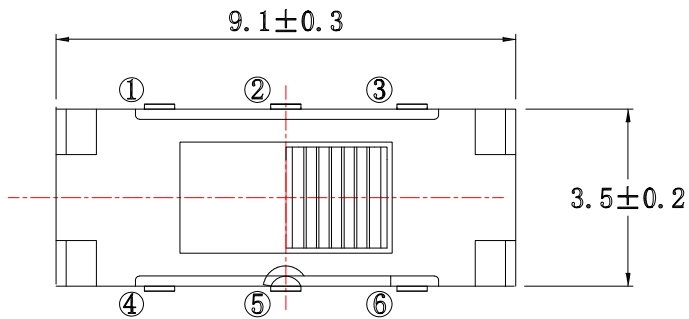


SS-B50x-x-S246




MODEL	X(mm)
SS-B50	2.0
SS-B50A	3.0
SS-B50C	4.0

SLIDER COLOR :

B: (MATERIAL:PA46,Black)
W: (MATERIAL:PPA,White)

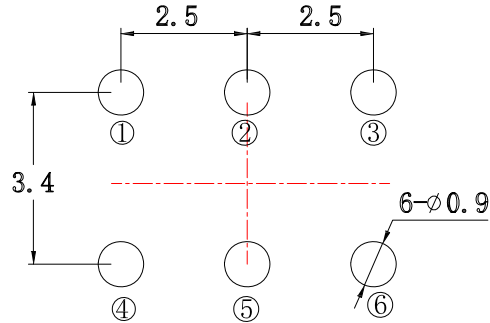

P.C.B LAYOUT

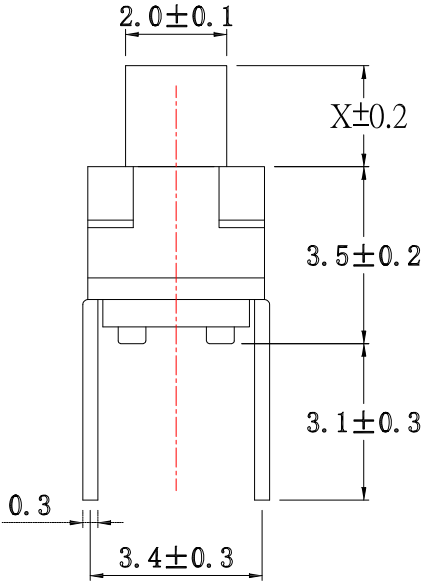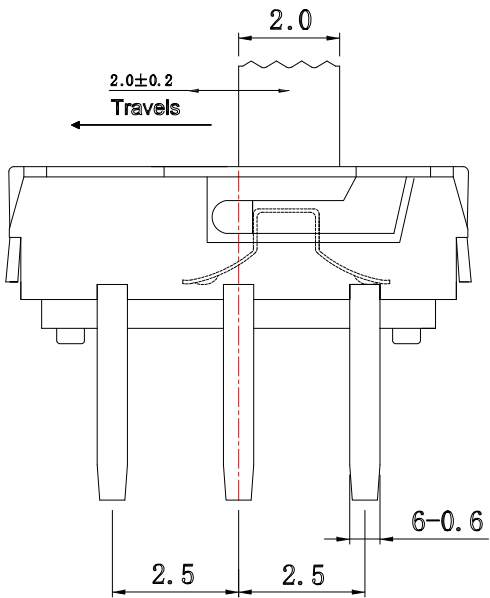

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	200 $\pm$ 70gf
Operating Life	10,000 cycles

E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	BASE	1	PA6T	Black
A	SLIDER	1	PA46 / PPA	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

5	更新圖面	Jack	053024
4	更新圖面	Jack	121018
3	更新材質	Jack	061015
2	更新高度代碼	Jack	060515
1	新增高度選項	Jack	032514
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MATL	TITLE	SWITCH
Jack Lu	05/30/24			
CHECKED BY:	DATE	FINISH	MODLE	SLIDE SWICTH
Jacky Chen	05/30/24			
APPROVED BY:	DATE	SCALE	DWG NO.	SS-B50x-x-S246
Tony Kao	05/30/24	1 : 1		
		SHEET NO.	PART NO.	SS-B50x-x-S246
		1 of 1		
				SIZE
				A4
				VER
				R5