

CIRCUIT DIAGRAM

P.C.B LAND PATTERN

SS-B70-x-S246



SLIDER COLOR :

Black : B

White : W

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	130 ± 50gf
Operating Life	10,000 cycles

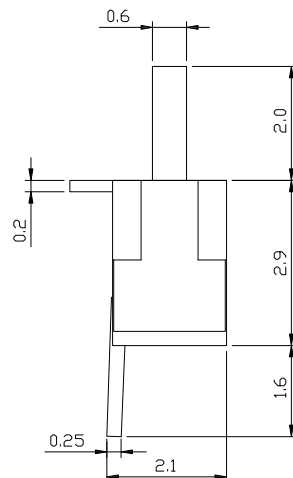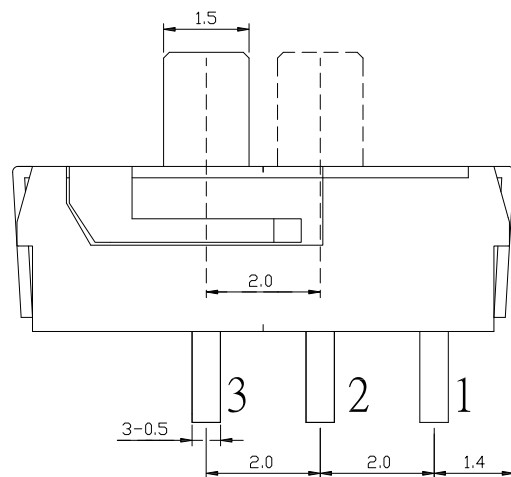

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	BeCu	Ag plated
C	COVER	1	STAINLESS STEEL	
B	CASE	1	PA6T	Black
A	SLIDER	1	PPA	

ITEM NO.	DESCRIPTION	DRAWN	DATE
9	更新CIRCUIT DIAGRAM	Jack	011020
8	更新CIRCUIT DIAGRAM	Jack	010920
7	更新為A0版	Jack	080417
6	新增PIN編號	Jack	030816
5	更新顏色選項	Jack	101415
4	更新圖面	Jack	102114
3	更新材質及SPEC	Jack	110613
2	更新材質	Jack	103113
1	更新圖面視圖位置	Jack	102313

**CONTACT** 建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3°

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	01/10/20		MODLE	SLIDE SWICTH
CHECKED BY:	DATE	SCALE	DWG NO.	SS-B70-x-S246
Jacky Chen	01/10/20	1 : 1	PART NO.	SS-B70-x-S246
APPROVED BY:	DATE	SHEET NO.		
Tony Kao	01/10/20	1 of 1		