
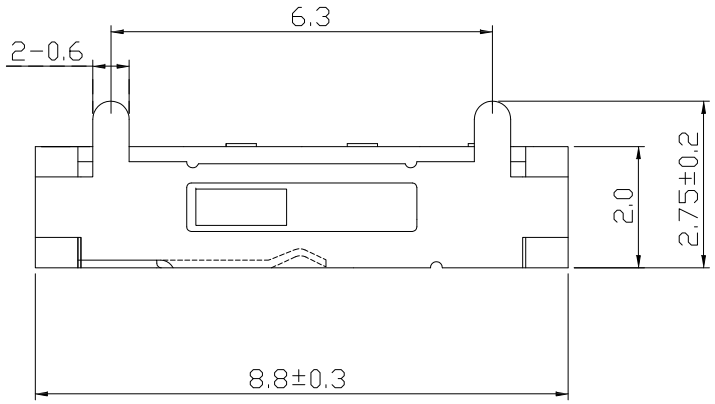



SS-B70-x-S246


SLIDER COLOR :


Black : B
White : W

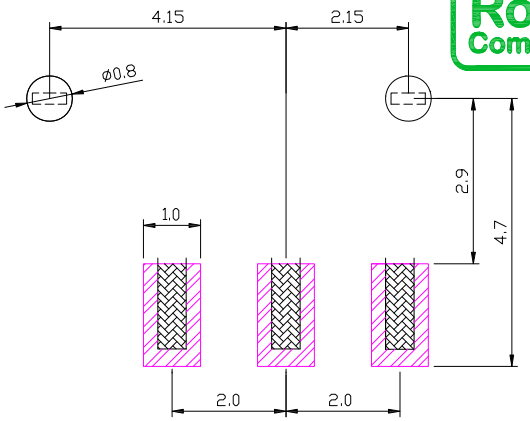

P.C.B LAND PATTERN

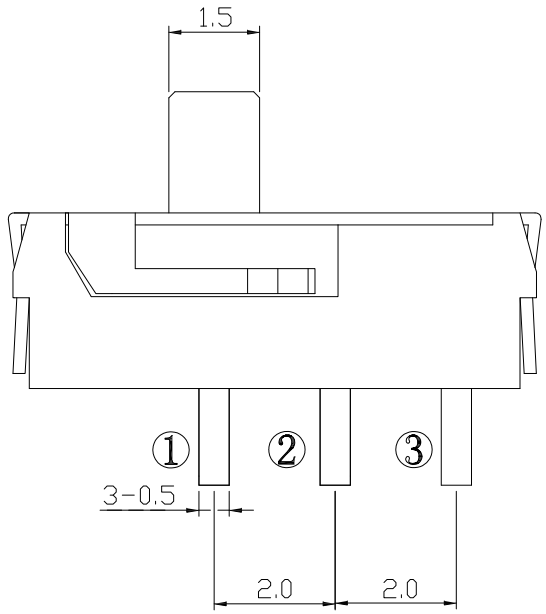

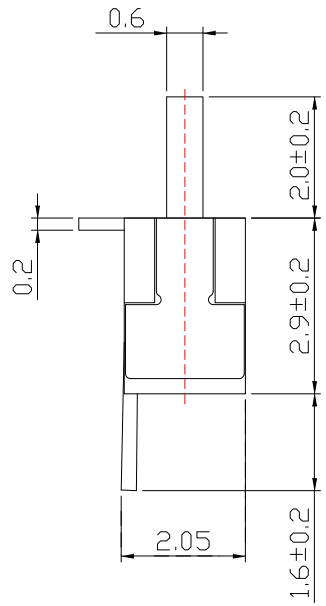



CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	120 ± 50gf
Operating Life	10,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	PHOSPHOR BRONZE	Ag plated
C	COVER	1	STAINLESS STEEL	
B	CASE	1	PA6T	Black
A	SLIDER	1	PPA	

ITEM NO.	DESCRIPTION	DRAWN	DATE				
9	更新CIRCUIT DIAGRAM	Jack	011020	12	更新Operating Force:120 ± 50gf	Jack	051321
8	更新CIRCUIT DIAGRAM	Jack	010920	11	更新材質	Jack	031621
7	更新為A0版	Jack	080417	10	更新圖面	Jack	022521
6	新增PIN編號	Jack	030816				
5	更新顏色選項	Jack	101415				
4	更新圖面	Jack	102114				
3	更新材質及SPEC	Jack	110613				
2	更新材質	Jack	103113				
1	更新圖面視圖位置	Jack	102313				

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS | MM

DRAWN BY: Jack Lu	DATE 05/13/21	MAT'L	
CHECKED BY: Jacky Chen	DATE 05/13/21	FINISH	
APPROVED BY: Tony Kao	DATE 05/13/21	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	SWITCH		
MODLE	SLIDE SWICTH		
DWG NO.	SS-B70-x-S246	SIZE	A4
PART NO.	SS-B70-x-S246	VER	R12