

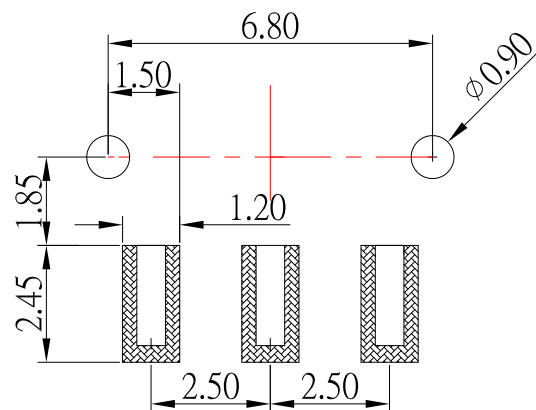




P.C.B LAND PATTERN

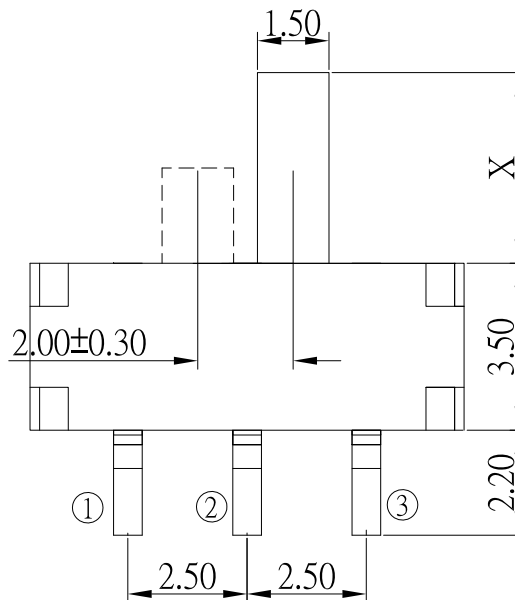

CIRCUIT DIAGRAM



SS-B80x-x-S246

Model No.	X (mm)
SS-B80	2.0
SS-B80A	4.0

SLIDER COLOR :

Black : B

White : W

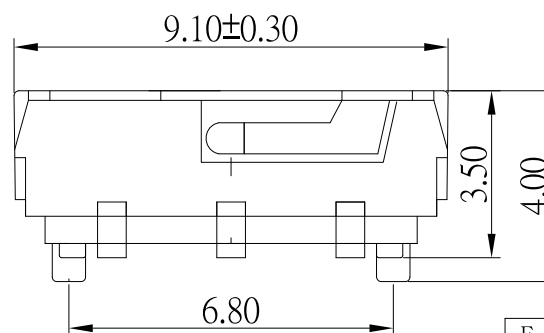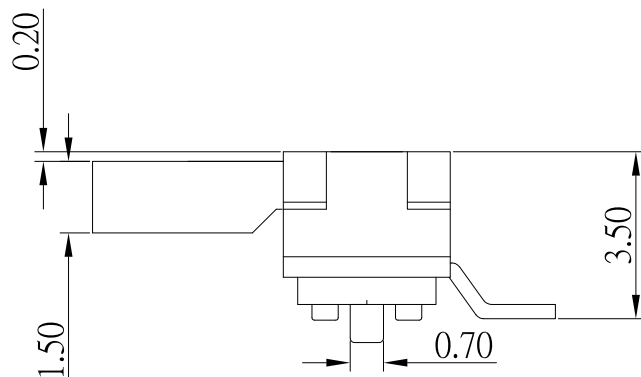

SPECIFICATIONS

Rating	100mA , 12V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	160 $\pm$ 60gf
Operating Life	10,000 cycles

9	更新SPEC	Jack	111122
8	更新材質	Jack	092821
7	更新材質	Jack	110719
6	新增撥柄顏色選項	Jack	102416
5	更新SPEC及材質	Jack	102214
4	更新材質	Jack	040214
3	更新為A0版	Jack	120313
2	更新料號	Jack	070413
1	更新Rating	Jack	062813
ITEM NO.	DESCRIPTION	DRAWN	DATE



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	11/11/22
CHECKED BY:	DATE
Jacky Chen	11/11/22
APPROVED BY:	DATE
Tony Kao	11/11/22

MAT'L	TITLE	SWITCH
FINISH	MODLE	SMT SLIDE SWICTH
SCALE	1 : 1	DWG NO. SS-B80x-x-S246
SHEET NO.	1 of 1	PART NO. SS-B80x-x-S246
		SIZE A4
		VER R9