

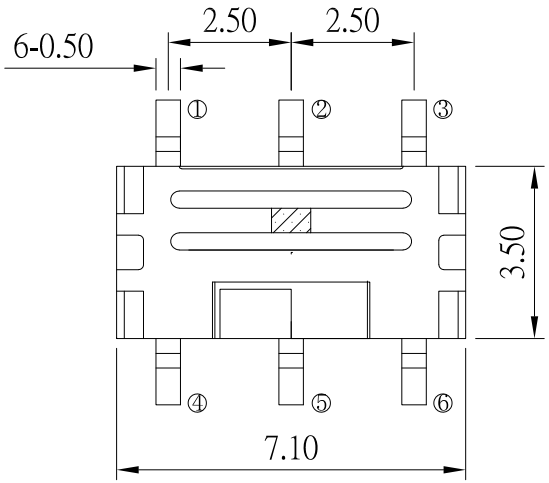


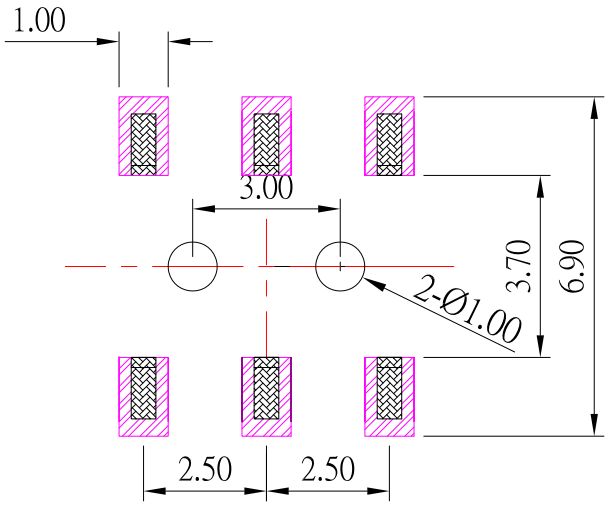



P.C.B LAND PATTERN



CIRCUIT DIAGRAM

MODEL NO.	SS-C90-S246	SS-C90A-S246	SS-C90B-S246	SS-C90C-S246
L (mm)	1.0	1.5	2.0	3.0
H (mm)	2.5	3.0	3.5	4.5

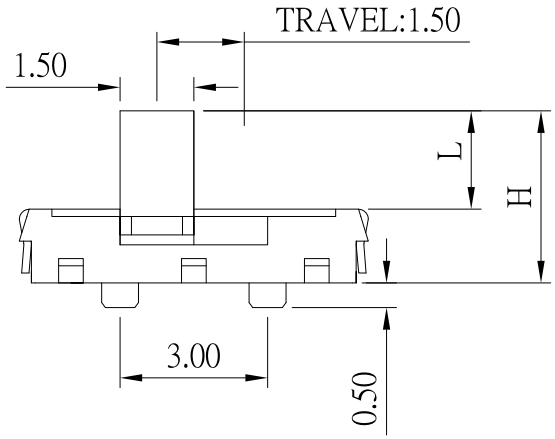

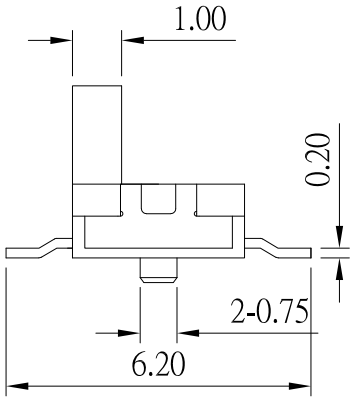

SPECIFICATIONS

Rating	100mA , 12V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	150 ± 50gf
Operating Life	10,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	Black

ITEM NO.	DESCRIPTION	DRAWN	DATE
11	更新SPEC	Jack	041326
10	更新CLIP材質	Jack	082922
9	新增TRAVEL:1.50	Jack	060118
8	更新圖面	Jack	120914
7	更新CLIP材質	Jack	101514

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S | UNITS | MM

DRAWN BY: Jack Lu	DATE 08/29/22	MAT'L	
CHECKED BY: Jacky Chen	DATE 08/29/22	FINISH	
APPROVED BY: Tony Kao	DATE 08/29/22	SCALE	1 : 1
		SHEET NO.	1 of 1

TITLE	SWITCH		
MODLE	SLIDE SWITCH		
DWG NO.	SS-C90x-S246	SIZE	A4
PART NO.	SS-C90x-S246	VER	R11