



CIRCUIT DIAGRAM

P.C.B LAND PATTERN

MODEL NO.	SS-C90-S246	SS-C90A-S246	SS-C90B-S246	SS-C90C-S246
L (mm)	1.0	1.5	2.0	3.0
H (mm)	2.5	3.0	3.5	4.5

SPECIFICATIONS

Rating	0.3A 4V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	170 ± 50gf
Operating Life	10,000 cycles

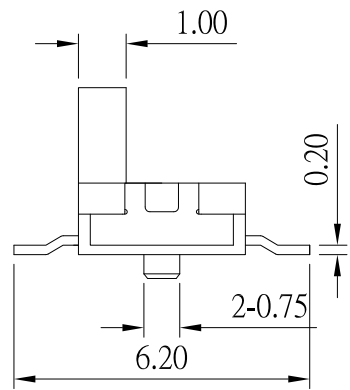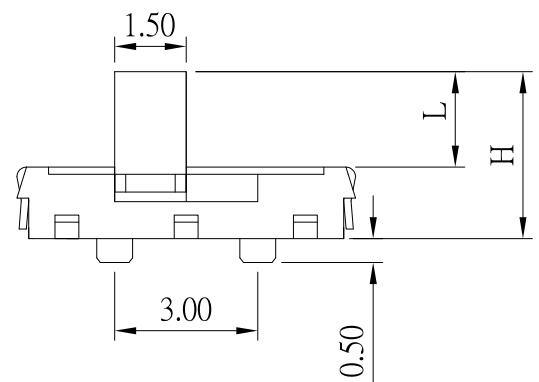

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	BECU	Ag plated
C	COVER	1	SUS	
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	Black

8	更新圖面	Jack	120914
7	更新CLIP材質	Jack	101514
6	更新Operating Force:150 ± 70gf	Jack	082214
5	更新材質	Jack	021414
4	新增高度選項"A"	Jack	021014
3	更新料號	Jack	112213
2	更新Rating及CIRCUIT DIAGRAM	Jack	062813
1	更新材質	Jack	060713
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	12/09/14		MODLE	SLIDE SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	SS-C90x-S246
Jacky Chen	12/09/14	1 : 1	PART NO.	SS-C90x-S246
APPROVED BY:	DATE	SHEET NO.	SIZE	A4
Tony Kao	12/09/14	1 of 1	VER	A8