


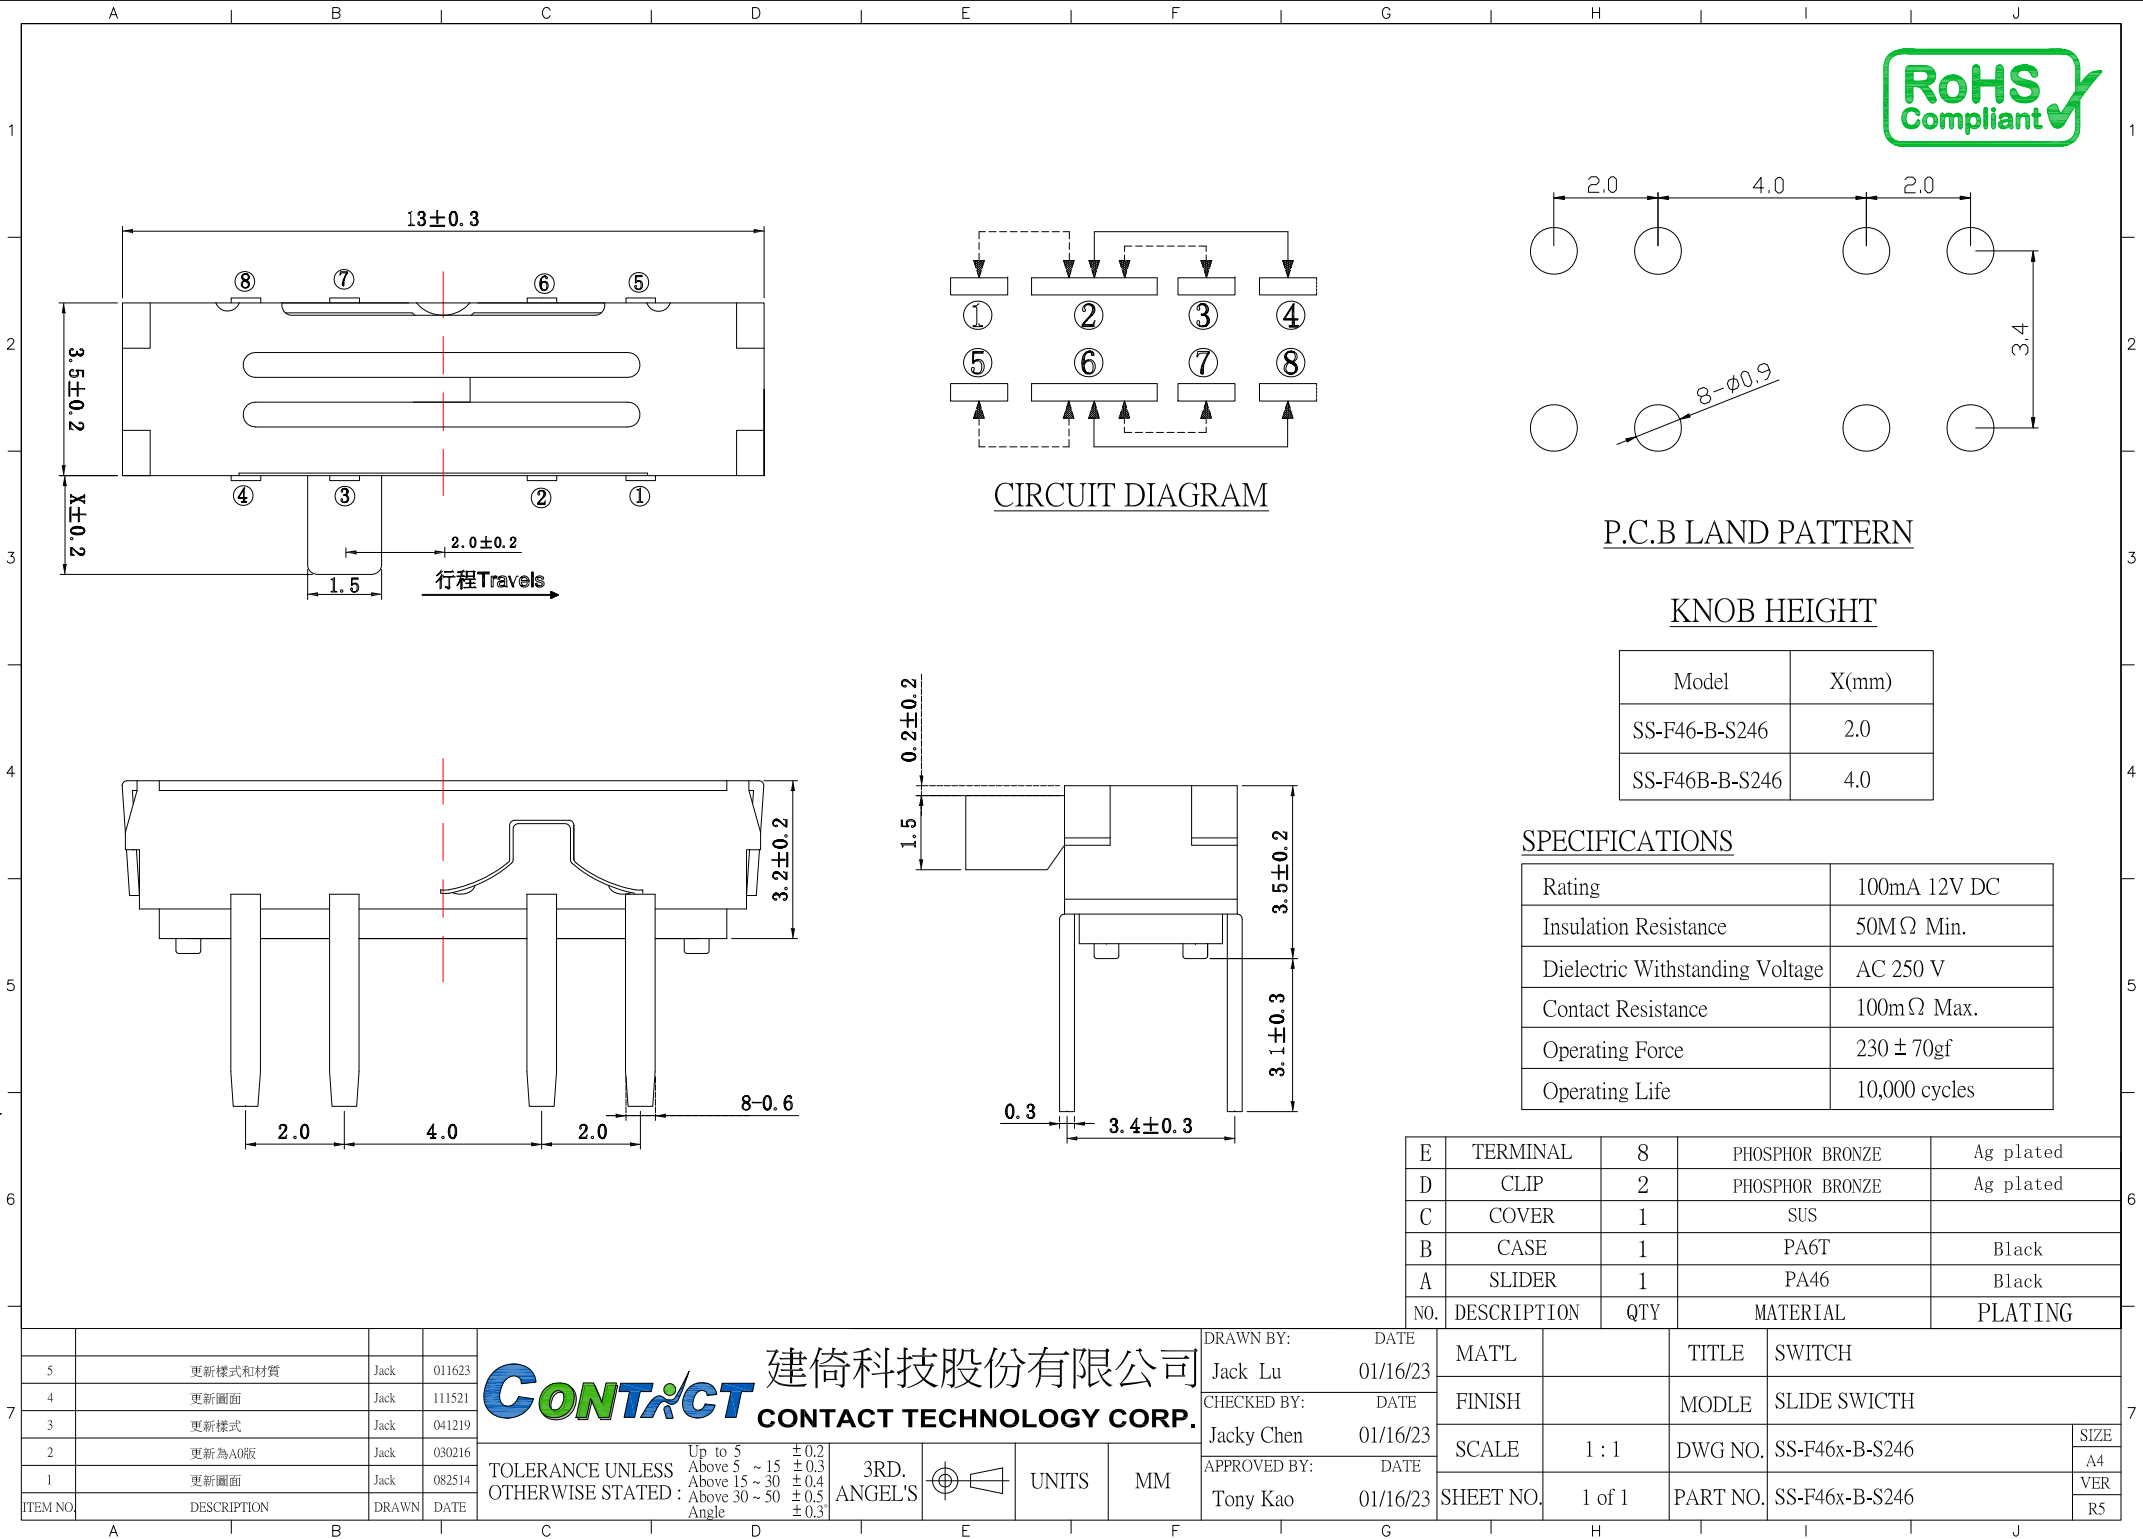

KNOB HEIGHT

Model	X(mm)
SS-F46-B-S246	2.0
SS-F46B-B-S246	4.0

SPECIFICATIONS

Rating	100mA 12V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V
Contact Resistance	100m Ω Max.
Operating Force	230 $\pm$ 70gf
Operating Life	10,000 cycles

E	TERMINAL	8	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA6T	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DATE	MAT'L		TITLE	SWITCH	
16/23					
DATE	FINISH		MODLE	SLIDE SWICHT	
16/23					
DATE	SCALE	1 : 1	DWG NO.	SS-F46x-B-S246	SIZE A4
16/23					
DATE	SHEET NO.	1 of 1	PART NO.	SS-F46x-B-S246	VER RS
16/23					

5	更新樣式和材質	Jack	011623
4	更新圖面	Jack	111521
3	更新樣式	Jack	041219
2	更新為A0版	Jack	030216
1	更新圖面	Jack	082514
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	01/16/2017
CHECKED BY:	DATE
Jacky Chen	01/16/2017
APPROVED BY:	DATE
Tony Kao	01/16/2017