
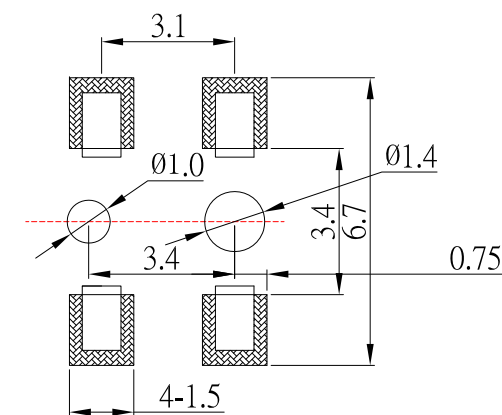
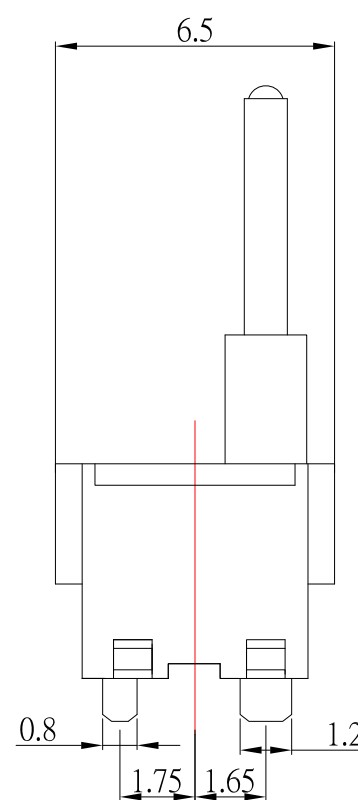
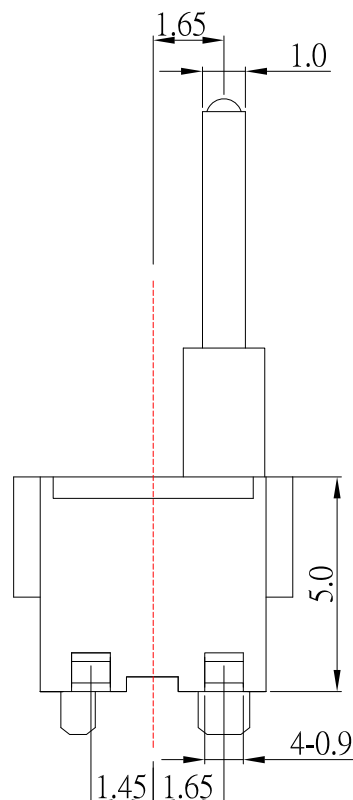


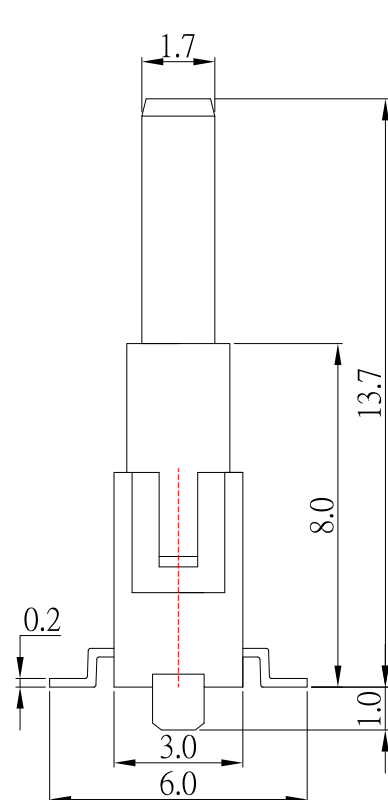

SPECIFICATIONS

Rating	DC 12V 0.1A
Contact Resistance	100mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±20gf
Life	100,000 cycles

E	THERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PA46	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	Q'TY	FINISH

DRAWN BY: DATE		MAT'L		TITLE	SWITCH	
Jack Lu	09/26/13	FINISH		MODLE	DETECTOR SWITCH	
CHECKED BY: DATE						
Jacky Chen	09/26/13	SCALE	1 : 1	DWG NO.	DS-A30L1-S246	SIZE A4
APPROVED BY: DATE		SHEET NO.	1 of 1	PART NO.	DS-A30L1-S246	VER R
Tony Kao	09/26/13					

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.
ANGEL'S



UNITS

MM