


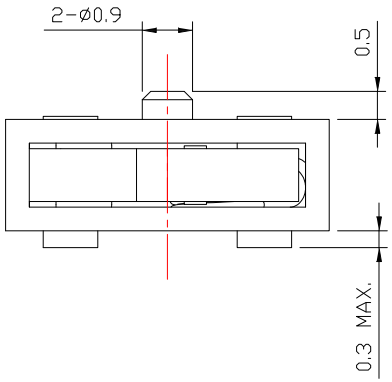





CIRCUIT DIAGRAM

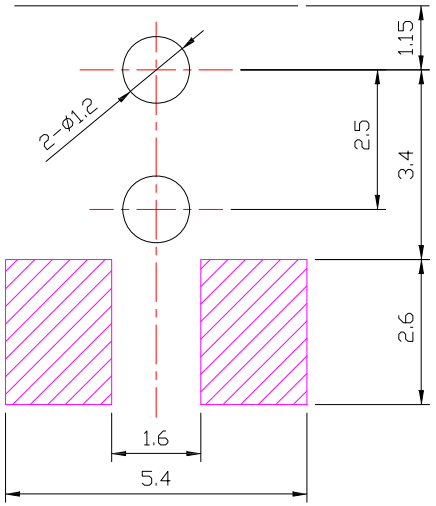

P.C.B LAYOUT

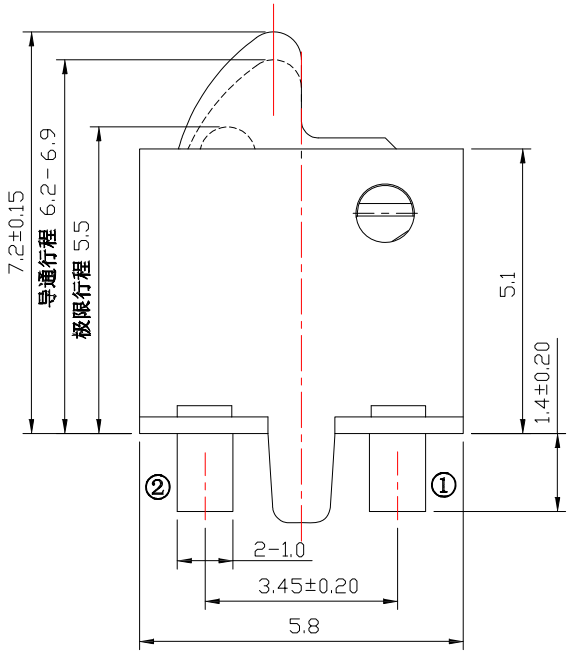

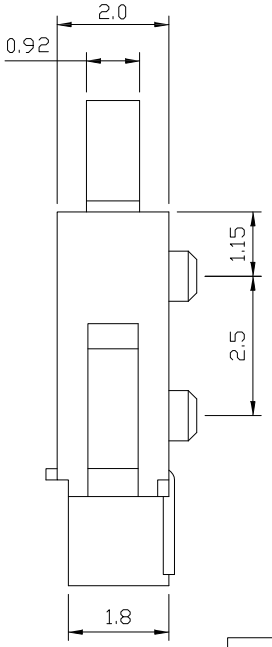

SPECIFICATIONS

Rating	DC 12V, 0.1A.
Contact Resistance	200mΩ Max.
Insulation Resistance	50MΩ Min.
Operating Force	20±10 gf
MechanicaL Life	30,000 cycles

NO	NAME	MATERIAL	QTY	FINISHING
4	TERMINAL	BRASS	2	Ag PLATED
3	SPRING	PHOSPHOR BRONZE	1	Ag PLATED
2	BASE	PA46(BLACK)	1	
1	KNOB	PA46(BLACK)	1	

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新圖面	Jack	011222

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 01/12/22	MAT'L	
CHECKED BY: Jacky Chen	DATE 01/12/22	FINISH	
APPROVED BY: Tony Kao	DATE 01/12/22	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	SWITCH		
MODLE	DETECTOR SWITCH		
DWG NO.	DS-A50-S379	SIZE	A4
PART NO.	DS-A50-S379	VER	R1