




SCHEMATIC (NON-SHORTING)

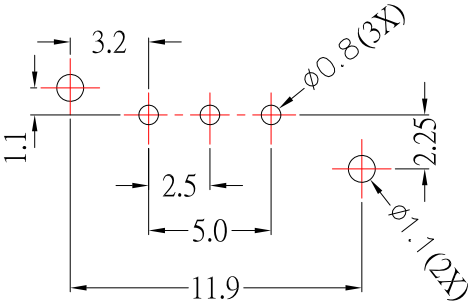

P.C.B LAYOUT
BOTTOM VIEW

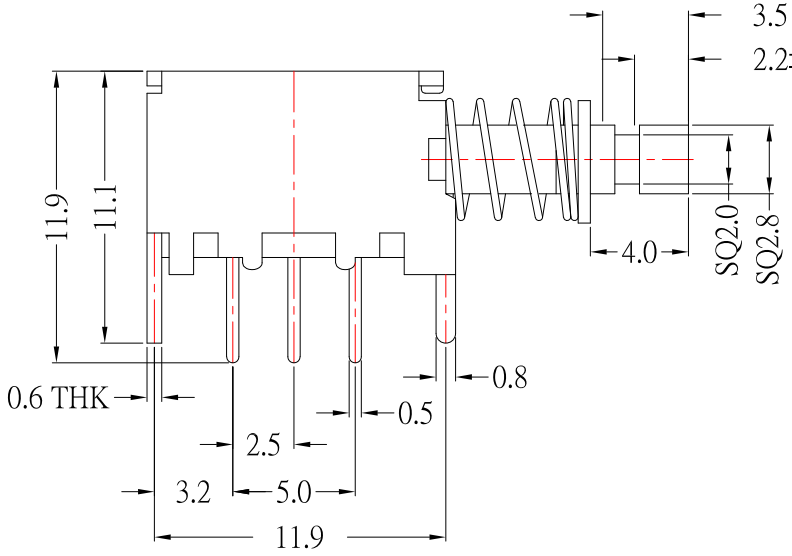

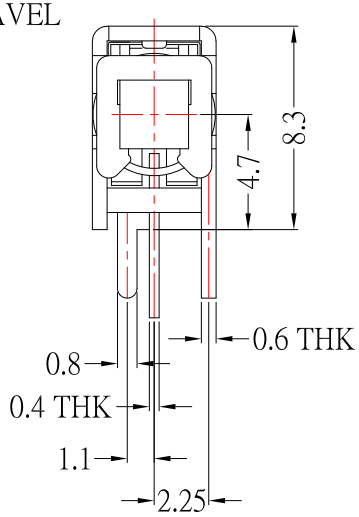

SPECIFICATIONS

1.Rating : DC50V 0.3A
2.Circuit : 1P2T
3.Timing : Non-Shorting
4.Operating force : 250 ± 100gf
5.Life test : 10,000 cycles
6.Operating Mode : Self-Lock

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
9	Contact Clip	1	Phosphor Bronze	Ag-Plating
8	Spring Plate	1	Phosphor Bronze	Natural
7	Base	1	Phenolic Resin	Natural
6	Terminal	3	Brass	Ag-Plating
5	Knob	1	PA66	Blue
4	Block	1	SPCC	Ni-Plating
3	Spring	1	Steel Wire	Ni-Plating
2	Cam Strick	1	PBS Wire	Ni-Plating
1	Frame	1	SPCC	Ni-Plating

ITEM NO.	DESCRIPTION	DRAWN	DATE
10	標示PCB LAYOUT為BOTTOM VIEW	Jack	101626
9	更新材質	Jack	020124
8	更新尺寸	Jack	081523
7	更新圖面	Jack	041019

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3'

3RD. ANGEL'S | UNITS MM

DRAWN BY:	Jack Lu	DATE	02/01/24
CHECKED BY:	Jacky Chen	DATE	02/01/24
APPROVED BY:	Tony Kao	DATE	02/01/24

MAT'L		TITLE	SWITCH	
FINISH		MODLE	PUSH SWITCH 藍柄 自鎖式	
SCALE	1 : 1	DWG NO.	PS-12E05-S191	SIZE A4
SHEET NO.	1 of 1	PART NO.	PS-12E05-S191	VER R10