


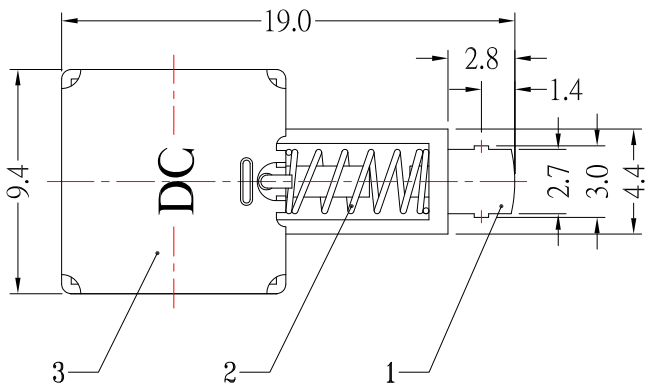


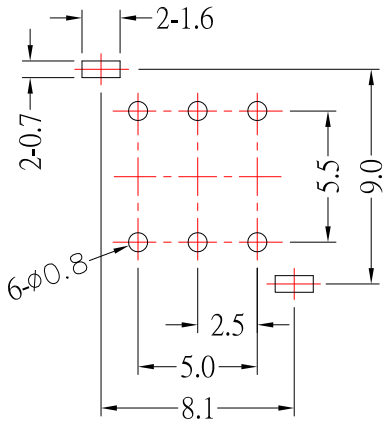


PCB LAYOUT
(BOTTOM VIEW)



SCHEMATIC(NON-SHORTING)

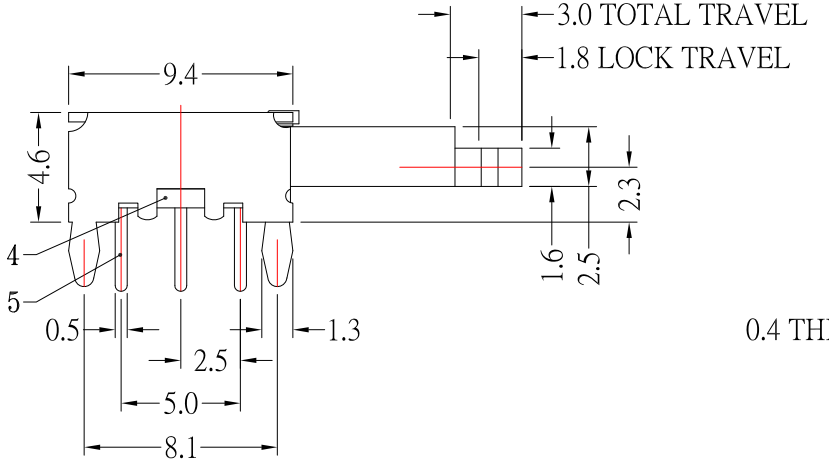

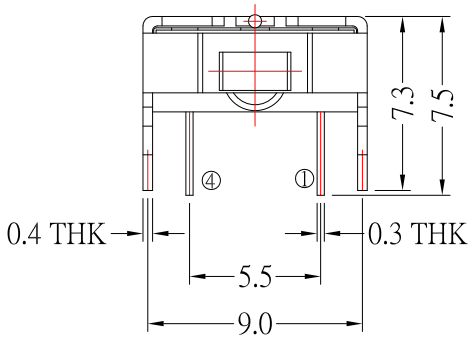

SPECIFICATIONS

1.Rating : DC 30V, 0.5A
2.Circuit : 2P2T
3.Timing : Non-Shorting
4.Operating force : 250 ± 100gf
5.Life test : 10,000 cycles
6.Operating Mode : Self-Lock

NO.	PARTS	MATERIALS	Q'TY	FINISH
8	CONTACT CLIP	PBS STRIP	2	Ag PLATED
7	CAM STICK	BRASS WIRE	1	NATURAL
6	SPRING PLATE	PBS STRIP	1	NATURAL
5	TERMINAL	BRASS STRIP	6	Ag PLATED
4	BASE	PHENOLIC RESIN	1	NATURAL
3	FRAME	STEEL STRIP	1	Ni PLATED
2	SPRING	STEEL WIRE	1	NATURAL
1	KNOB	POM	1	YELLOW

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新圖面	Jack	060220
3	新增SPEC	Jack	102615
2	新增PIN編號	Jack	112614
1	新增Operating Mode	Jack	072514

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 06/02/20	MAT'L	
CHECKED BY: Jacky Chen	DATE 06/02/20	FINISH	
APPROVED BY: Tony Kao	DATE 06/02/20	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	SWITCH		
MODLE	PUSH SWITCH 黃色炳		
DWG NO.	PS-22E02-S191	SIZE	A4
PART NO.	PS-22E02-S191	VER	R4