

PS-22E05x-S191



Blank	Self-Lock
N	Non-Lock

SCHEMATIC

P.C.B LAYOUT MOUNTING PATTERN
BOTTOM VIEW

SPECIFICATIONS

- 1.Rating : DC50V 0.3A
- 2.Circuit : 2P2T
- 3.Timing : Non-Shorting
- 4.Operating force : 250 ± 100 gf
- 5.Life test : 10,000 cycles

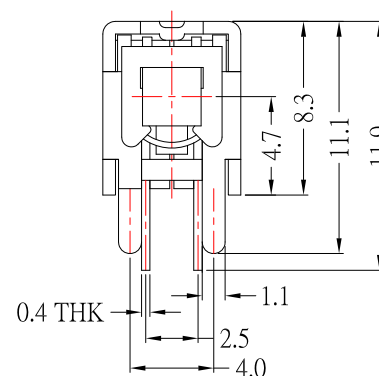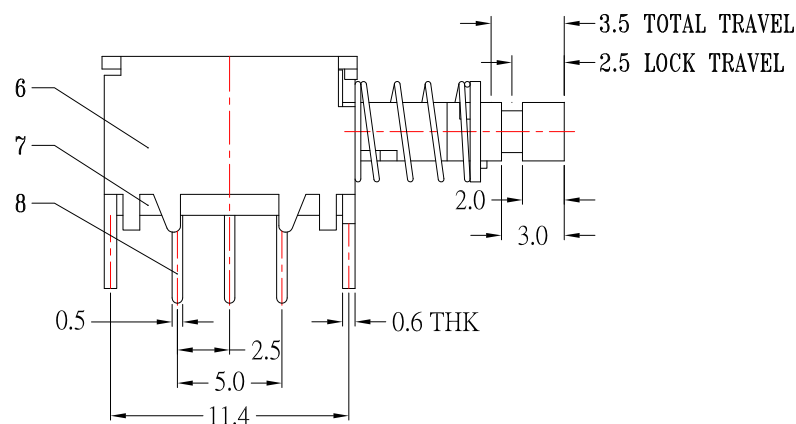

9	Contact Clip	2	PBS	Ag-Plating
8	Terminal	6	Brass	Ag-Plated over Ni Plated
7	Base	1	Phenolic Resin	Natural
6	Frame	1	Stainless Steel	Ni-Plating
5	Spring Plate	1	PBS	Natural
4	Cam Stick	1	PBS Wire	Natural
3	Spring	1	Steel Wire	Ni-Plating
2	Block	1	Stainless Steel	Ni-Plating
1	Knob	1	POM	Yellow
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

5	新增選項	Jack	031620
4	新增SPEC	Jack	102315
3	更新圖面	Jack	020915
2	新增Operating Mode	Jack	072514
1	更新材質	Jack	021814
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	03/16/20
CHECKED BY:	DATE
Jacky Chen	03/16/20
APPROVED BY:	DATE
Tony Kao	03/16/20

MAT'L		TITLE	SWITCH
FINISH		MODLE	PUSH SWITCH SELF-LOCK
SCALE	1 : 1	DWG NO.	PS-22E05x-S191
SHEET NO.	1 of 1	PART NO.	PS-22E05x-S191
		SIZE	A4
		VER	R5