

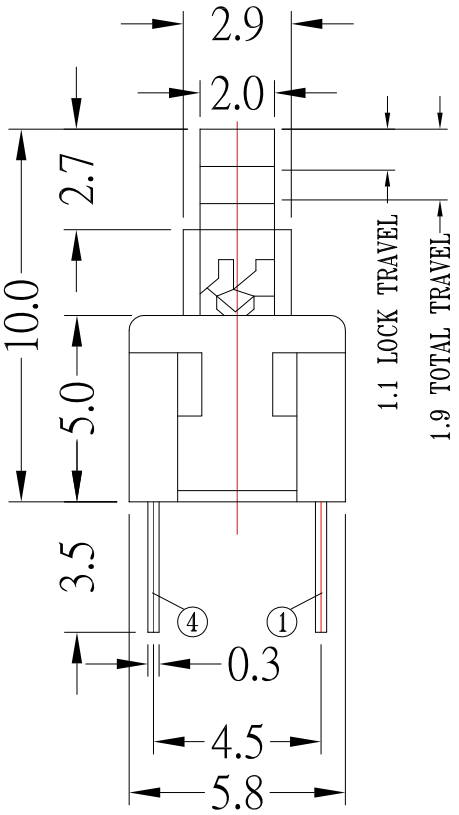


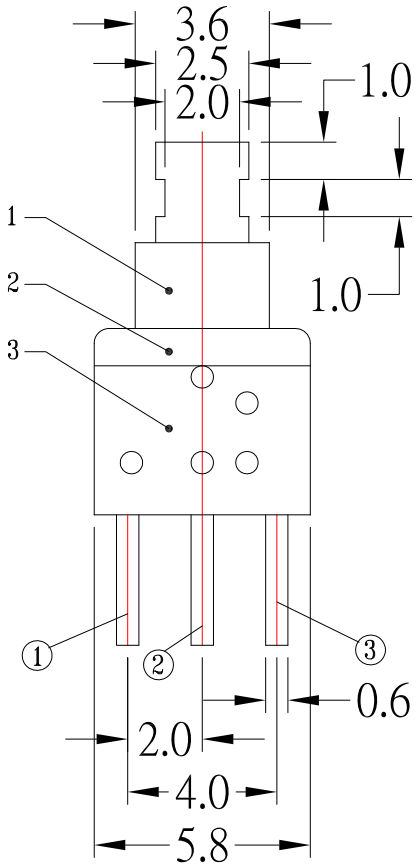

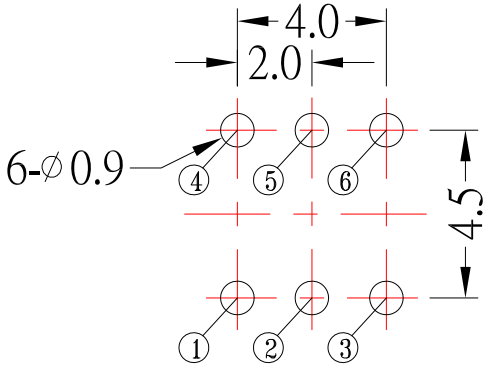

P.C.B LAYOUT
BOTTOM VIEW

RoHS Compliant

SPECIFICATIONS:

1.RATTING: 12V DC / 0.2A

2.CIRCUIT: 2C-2P


3.TIMING: NON-SHORTING

4.OPERATING MODE: SELF-LOCK : PS-D16L-S191(KNOB:White)

Non-LOCK : PS-D16NL-S191(KNOB:GREY)

5.OPERATING FORCE: 250±100 gf

6.OPERATING LIFE:10,000 Cycles



CIRCUIT DIAGRAM

NO.	PARTS	MATERIALS	Q'TY	FINISH
7	SPRING	SUS	1	NATURAL
6	CAM STICK	SUS	1	NATURAL
5	TERMINAL	BRASS	6	Ag PLATED
4	CASE	PPA	1	GREY
3	COVER	PA66	1	BLACK
2	CONTACT	PHOSPHOR BRONZE	2	Ag PLATED
1	KNOB	PBT	1	WHITE / GREY

ITEM NO.	DESCRIPTION	DRAWN	DATE
6	新增OPERATING LIFE	Jack	030623
5	更新圖面	Jack	102220
4	新增PCB LAYOUT尺寸	Jack	080918
3	依KNOB顏色區分代表SELF-LOCK or Non-LOCK	Jack	051616
2	新增材質	Jack	032514
1	更新圖面及SPEC	Jack	021914

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS | MM

		DATE
DRAWN BY:	Jack Lu	03/06/23
CHECKED BY:	Jacky Chen	03/06/23
APPROVED BY:	Tony Kao	03/06/23

MAT'L		TITLE	SWITCH
FINISH		MODLE	PUSH SWITCH
SCALE	1 : 1	DWG NO.	PS-D16x-S191
SHEET NO.	1 of 1	PART NO.	PS-D16x-S191

SIZE A4 | VER R6