
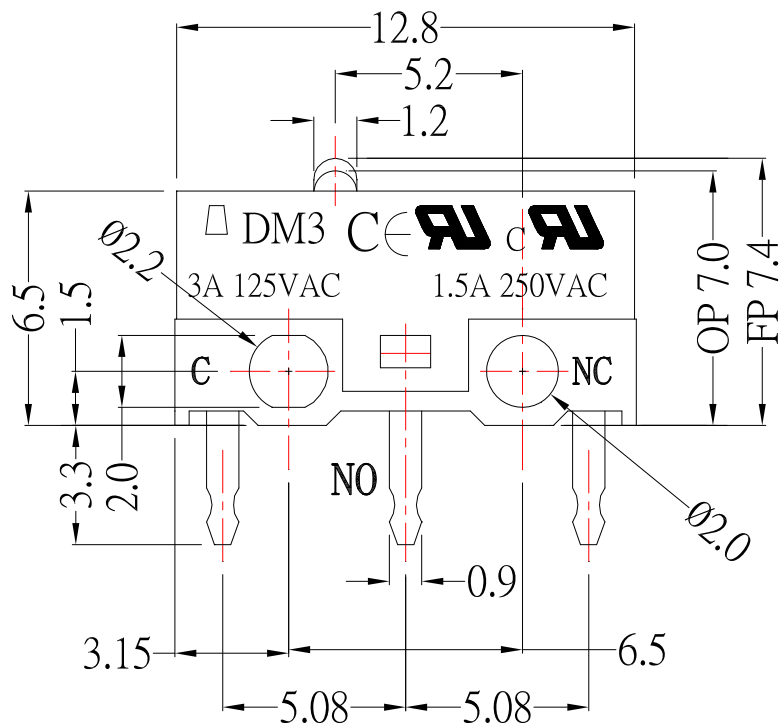


SCHEMATIC



1. Functional spec.	
1.1 Rated Voltage	AC125V 3A / AC250V 1.5A
1.2 Contact Resistance	≤100mΩ
1.3 Operating Force	130 ± 30 gf
1.4 Free Position	7.35 ± 0.2 mm
1.5 Operating Position	7.0 ± 0.2 mm
2. Reliable Rating	
2.1 Mechanical Life	1000,000 CYCLES
2.2 Electrical Life	10,000 / 1,000,000 CYCLES
2.3 Insulation Resistance	≥100MΩ DC500V
2.4 Withstand Voltage	AC500V 1 minute
2.5 Soldering Temper	250°C Max 3 Sec.
2.6 Operating Temper	-25°C ~ +65°C
2.7 Ambient Humidity Used	<85%RH

				DRAWN BY: Jack Lu				DATE	12/09/15	MAT'L		TITLE	SWITCH
				CHECKED BY: Jacky Chen				DATE	12/09/15	FINISH		MODLE	MICRO SWITCH
				APPROVED BY: Tony Kao				DATE	12/09/15	SCALE	1 : 1	DWG NO.	DM3-00P
										SHEET NO.	1 of 1	PART NO.	DM3-00P
													SIZE
													A4
													VER
													R2

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

更新Rated Voltage

Jack

120915

圖面標示更新

Jack

031714

圖面更新

FrankWu

120211

ITEM NO.

DESCRIPTION

DRAWN

DATE

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2

Above 5 ~ 15 ±0.3

Above 15 ~ 30 ±0.4

Above 30 ~ 50 ±0.5

Angle ±0.3

3RD. ANGEL'S

UNITS

MM