




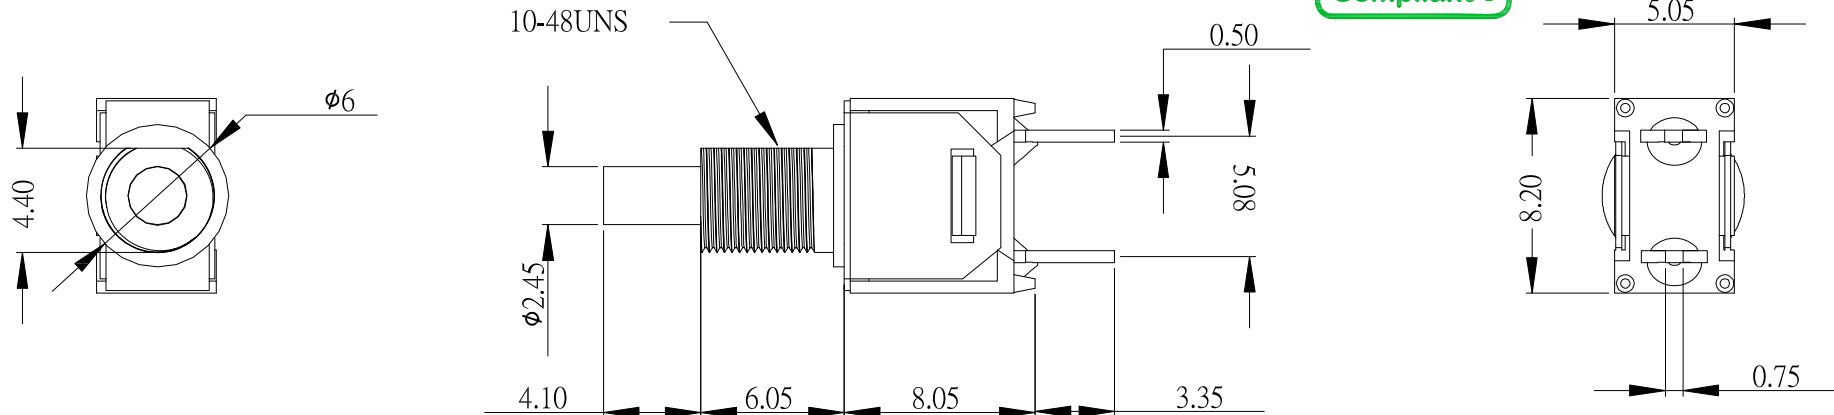


PRODUCT IMAGE

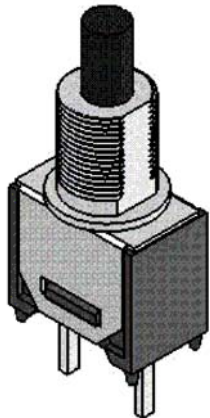

P.C.MOUNTING



SCHEMATIC



SPECIFICATIONS:

CONTACT RATING : 1 AMPS @ 120 V AC or 28 V DC.

0.4 VA AMPS @ 20V AV or DC.

ELECTRICAL LIFE : 30,000 make-and-break cycles at full load.

CONTACT RESISTANCE : 20 mΩ max. initial @ 2-4 VDC

100 mA , for both silver and gold plated contacts.

INSULATION RESISTANCE : 1,000 MΩ min

DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.

OPERATING TEMPERTURE : -30°C to 130°C

MATERIALS:

CASE : Dially phthalate (DAP)(UL-94V-0)

PLUNGER : Thermoplastic polyester-black.

BUSHING : Brass, nickel plated.

HOUSING : Stainless steel.

TERMINAL/CONTACT : Brass , with silver or gold plated or gold over silver.

SWITCH SUPPORT : Brass , tin plated.

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Frank Wu

DATE
10/18/11

CHECKED BY:
Jacky Chen

DATE
10/18/11

APPROVED BY:
Tony Kao

DATE
10/18/11

MAT'L	TITLE	SWITCH
FINISH	MODLE	TOGGLE PUSH SWITCH
SCALE	1 : 1	DWG NO. AS-01B1A2
SHEET NO.	1 of 1	PART NO. AS-01B1A2

SIZE
A4
VER
A