


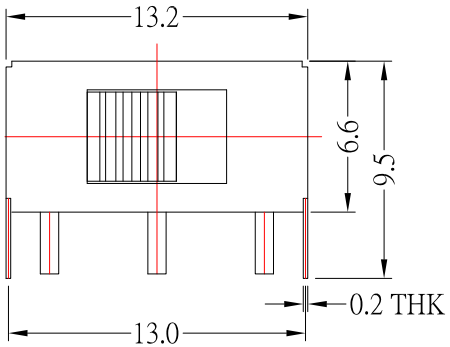





SCHEMATIC (NON-SHORTING)

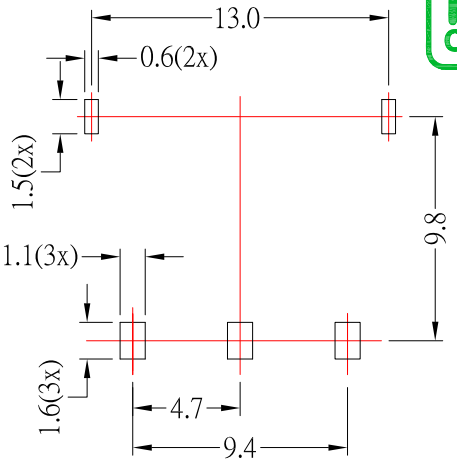

P.C.B LAYOUT
BOTTOM VIEW

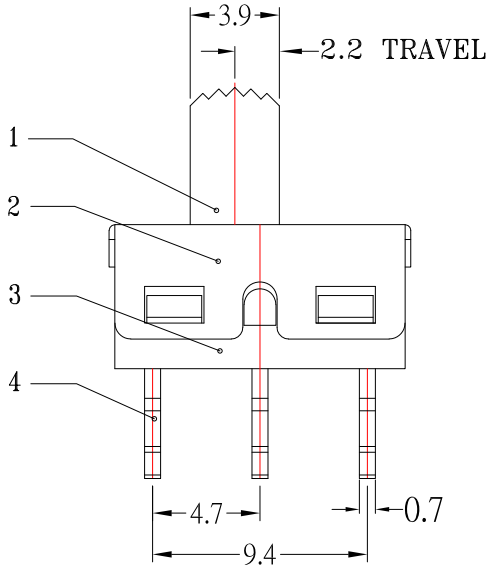

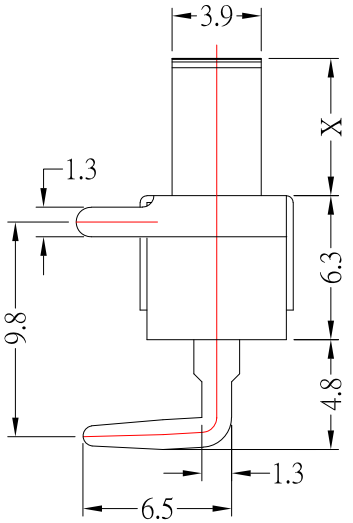

Model No.	X(mm)
SS-12D11-GA3	3mm
SS-12D11-GA4	4mm
SS-12D11-GA5	5mm
SS-12D11-GA6	6mm
SS-12D11-GA7	7mm
SS-12D11-GA8	8mm
SS-12D11-GA9	9mm
SS-12D11-GA10	10mm

SPECIFICATIONS

1.RATING: 50V AC , 0.5A

2.CONTACT RESISTANCE: 200 mΩ Max

3.INSULATION RESISTANCE: 100 MΩ Min

4.OPERATING FORCE: 250 ± 100gf

5.LIFE:10,000 CYCLES

NO.	PARTS	MATERIALS	Q'TY	FINISH
7	STEEL BALL	STEEL	1	NATURAL
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT	BRASS	1	Ag PLATED
4	TERMINAL	BRASS	3	Ag PLATED
3	CASE	PA9T	1	BLACK
2	COVER	SUS	1	NATURAL
1	KNOB	PA9T	1	BLACK

ITEM NO.	DESCRIPTION	DRAWN	DATE
10	新增PCB LAYOT尺寸	Jack	091125
9	更新尺寸	Jack	110122
8	更新柄長選項	Jack	011420
7	新增PCB LAYOT尺寸	Jack	010319

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS | MM

DRAWN BY: Jack Lu	DATE 09/11/25	MAT'L	
CHECKED BY: Jacky Chen	DATE 09/11/25	FINISH	
APPROVED BY: Tony Kao	DATE 09/11/25	SCALE	1 : 1
		SHEET NO.	1 of 1

TITLE	SWITCH		
MODLE	SLIDE SWITCH		
DWG NO.	SS-12D11-GAx-S191	SIZE	A4
PART NO.	SS-12D11-GAx-S191	VER	R10