

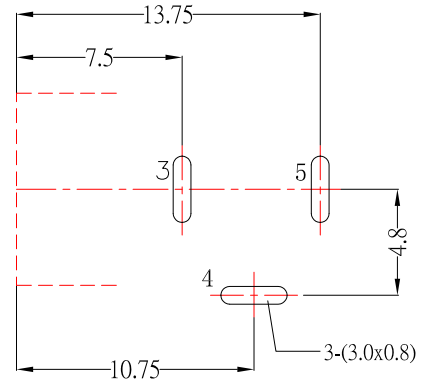
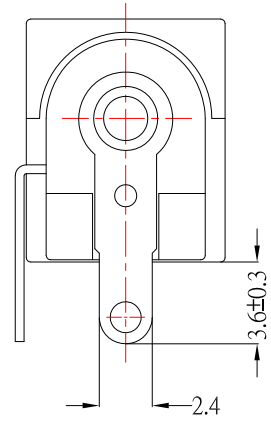
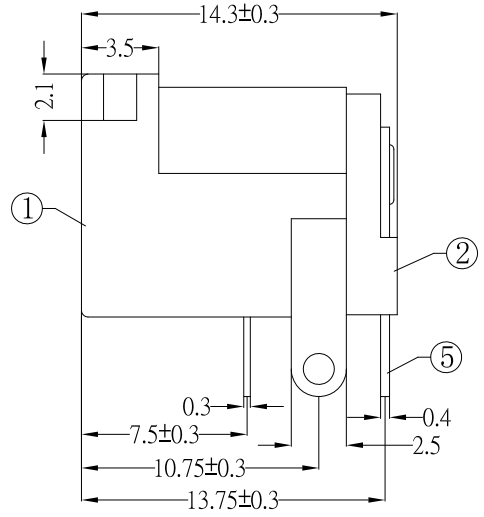
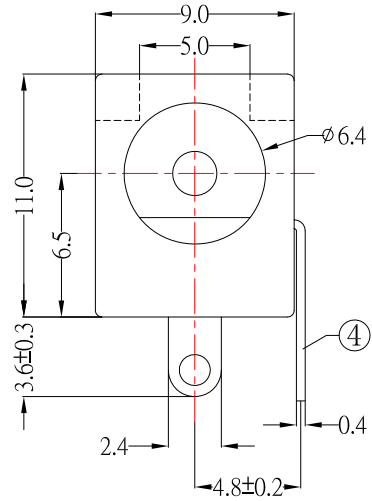
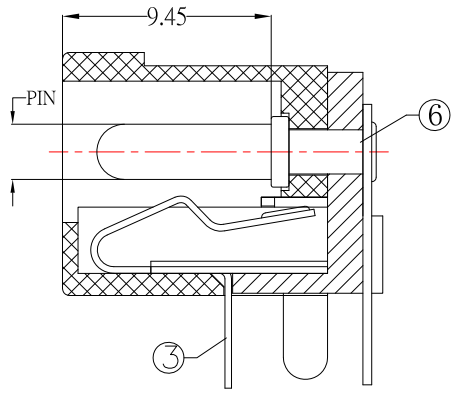


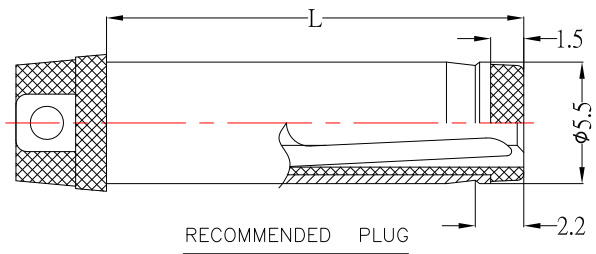

P.C.B LAYOUT
TOP VIEW



MODEL NO.	DC-002H-1-x-S124
SCHEMATIC	
CENTER PIN	Ø2.0 mm
	Ø2.5 mm

SPECIFICATION

- 1.Rating : DC 12V , 6.0A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

⑥	PIN	1	BRASS	Ni-Plating
⑤	CURVE PIECE	1	BRASS	Sn-Plating
④	FLAT PIECE	1	BRASS	Sn-Plating
③	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
②	COVER	1	LCP	
①	HOUSING	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

3	更新PCB LAYOUT外型孔	Jack	040621
2	新增尺寸	Jack	030620
1	新增尺寸	Jack	041018
ITEM NO.	DESCRIPTION	DRAWN	DATE

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	04/06/21			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK DIP TYPE
Jacky Chen	04/06/21			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-002H-1-x-S124
Tony Kao	04/06/21	1 : 1		
		SHEET NO.	PART NO.	DC-002H-1-x-S124
		1 of 1		
				SIZE A4
				VER R3