

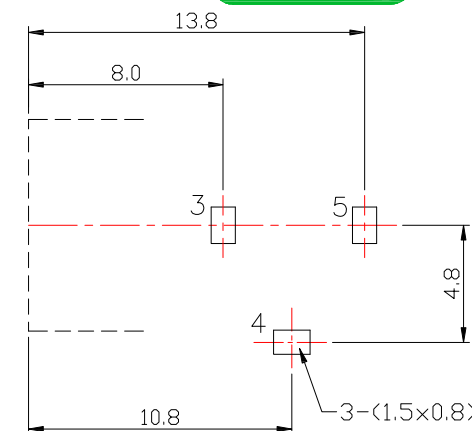
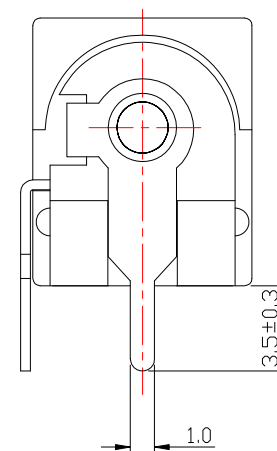
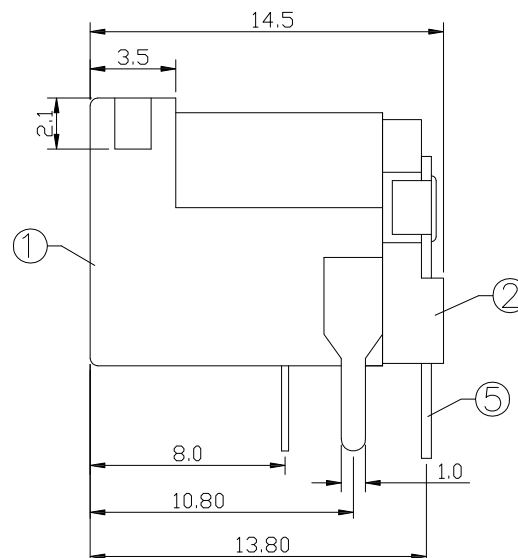


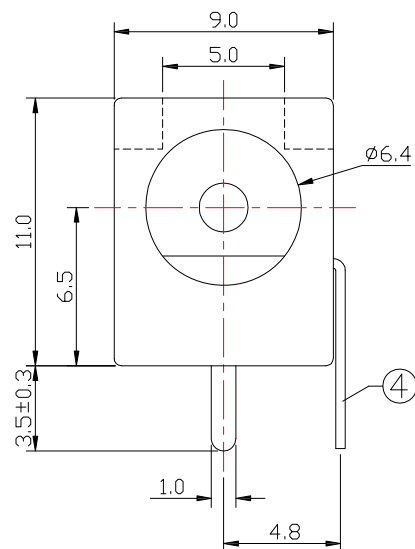


P.C.B LAYOUT
TOP VIEW

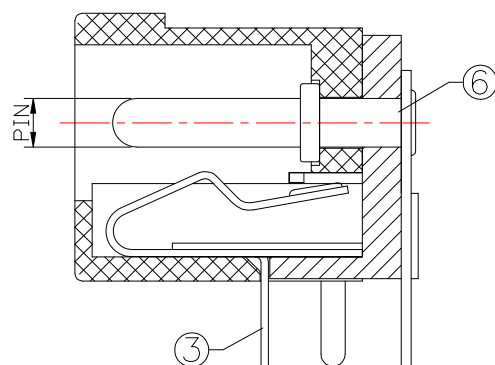

SPECIFICATION

- 1.Rating : DC 30V 2.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

MODEL NO.	DC-002-3-x
SCHEMATIC	
CENTER PIN	Ø2.0 mm
	Ø2.5 mm

6	PIN	1	BRASS	Ni-Plating
5	FLAT FOOT	1	BRASS	Sn-Plating
4	CURVE PIECE	1	BRASS	Sn-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
2	COVER	1	PBT	
1	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	04/23/19	FINISH	MODLE	DC JACK
CHECKED BY:	DATE	SCALE	DWG NO.	DC-002-3-x-S124
Jacky Chen	04/23/19	1 : 1	PART NO.	DC-002-3-x-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	04/23/19			



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM