
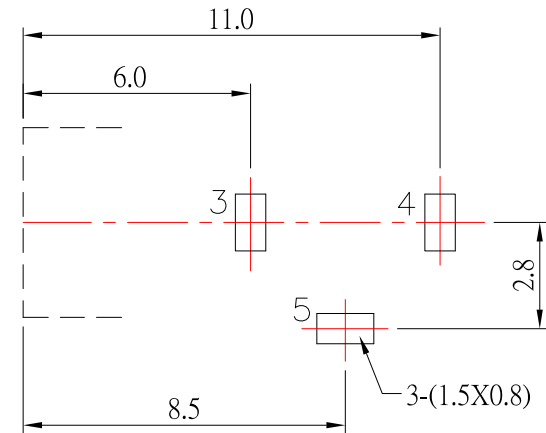


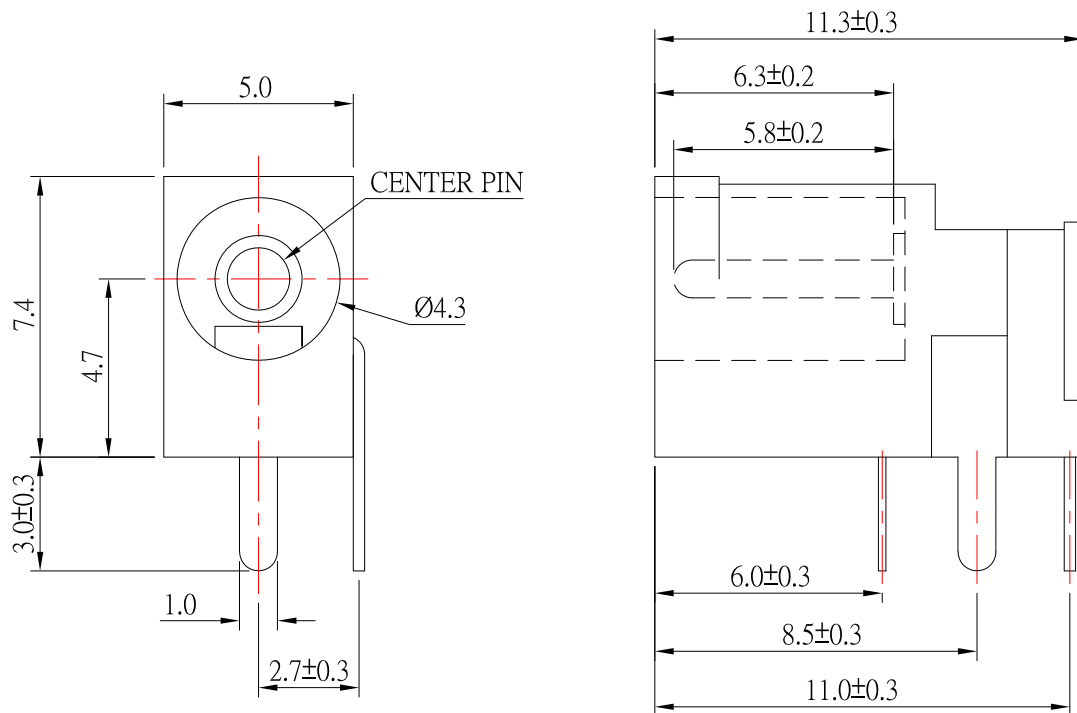


P.C.B LAYOUT TOP VIEW

MODEL NO.	DC-009-1-x-S124
SCHEMATIC	 4/6 (+) 5 3 (-)
CENTER PIN	Ø1.0 mm
	Ø1.3 mm

SPECIFICATION

- 1.Rating : DC 30V, 3.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

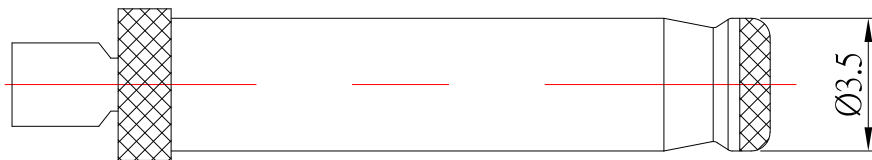

RECOMMENDED PLUG

6	PIN	1	H59	Sn-PLATED
5	CURVE PIECE	1	BRASS	Sn-PLATED
4	FLAT PIECE	1	BRASS	Sn-PLATED
3	SPRING	1	SUS	Sn-PLATED
2	COVER	1	PBT	
1	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	FINISH

6	更新圖面	Jack	070826
5	更新圖面	Jack	120125
4	更新材質	Jack	101725
3	更新樣式	Lan	062019
2	更新圖面	Jack	112917
1	更新為A0版	Jack	100516
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	07/08/26	FINISH	MODLE	DC JACK
CHECKED BY:	DATE	SCALE	DWG NO.	DC-009-1-x-S124
Jacky Chen	07/08/26	1 : 1	PART NO.	DC-009-1-x-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	07/08/26			